


# OMC 8020-2UNIC.5DOR

## 2x UNIVERSAL ANALOGUE INPUTS + 5x RELAYS

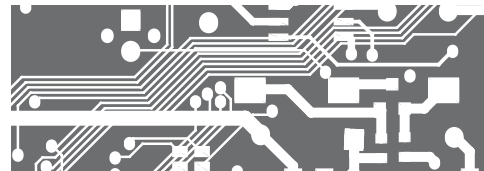

### CONNECTING THE MODULE

Prior to wiring the module to the power supply, always make sure the power supply is switched off

1. Connect module OMC 8020-2UNIC.DOR to the main module using an included connector cable (female connectors are located at the top of the module housing and protected by a circular rubber plug)
2. Switch on the power supply of the whole system
3. Assign an address to the newly connected module (see Edit Modules setting below)
4. Switch off the power supply of the whole system

### ENTERING THE MENU OF OMC 8000

Instrument's menu can be entered in two different ways:

1. By pressing the **OK** key while the screen which lists the connected modules is displayed and hold it for the entire duration of its projection. Alternatively the **OK** key can be kept pressed already from the moment of Power-on.
2. By pressing the **UP** and **DOWN** keys simultaneously for 3 seconds (Arrow Up and Arrow Down) provided the PLC program is not running (LED RUN is not on). Only in this way the menu item Start can be accessed.

|                     |         |
|---------------------|---------|
| <b>OMC 8000</b>     |         |
| 192.168.1.48        |         |
| 12.04.16 14:22:45   |         |
| Language            | English |
| Password            | ****    |
| Quick start         | No      |
| Block debug         | No      |
| Autorecovery        | Yes     |
| RTC                 |         |
| Display             |         |
| <b>Edit modules</b> |         |
| Reread modules      |         |
| Ethernet            |         |

### EDIT MODULES SETTING

This menu item allows assigning addresses to connected modules. In case there is no module connected, the screen is empty.

Changes realized in this setting are executed immediately. Pressing the **ESC** key does not mean the setting has not been already saved.

Keys **UP/DOWN** are used to select the module which is to be assigned. **LED RUN** flashes on the momentarily selected module.

Pressing the **OK** key activates the module to be assigned. The module's details are shown in inverse colors on the display.

**UP/DOWN** keys rank the module into the desired position in the list.

The **OK** button Unhighlights the module.

**ESC** key terminates the process of assigning addresses.

|                     |                     |
|---------------------|---------------------|
| <b>OMC 8000</b>     |                     |
| 192.168.1.48        |                     |
| 12.04.16 14:23:14   |                     |
| <b>1 8020.2UNIC</b> | <b>120160313012</b> |
| 2 8100. SM          | 120160409024        |
| 3 8100. SM          | 120160409025        |
| 4 8100. SM          | 120160409026        |

### RE-READ MODULES SETTING

Resets the table of modules and reads it again.

The rest is as described above.

# OMC 8020-2UNIC.5DOR

## TECHNICAL DATA

### ANALOGUE INPUTS

|                     |   |
|---------------------|---|
| Number              | 2   |
| Type                | analogue, universal   |
| Isolated inputs     | yes   |
| Range               | DC: $\pm 90/\pm 80$ mA,<br>$\pm 30/\pm 60/\pm 1000$ mV, $\pm 20/40/80$ V<br>PM: $\pm 20$ mA/4...20 mA, $\pm 2/\pm 5/\pm 10$ V<br>OHM: 0...0.1/0.3/3/30 k $\Omega$<br>RTD: Pt 50/100/1 000<br>Ni 1 000/10 000<br>T/C: J/K/T/E/B/S/R/N/L<br>DU: Lin. potentiometer (min. 500 $\Omega$ ) |
| Resolution          | 24 bits   |
| Overload capacity   | 10x   |
| Cold Junction Comp. | yes   |
| Accuracy            | 0,15 % of range   |
| Rate                | 0.5/1.2/2.5/5/10/20/40/80/160 measurements/s  |
| LED signalisation   | yes   |

### DIGITAL OUTPUTS

|                        |                     |
|------------------------|---------------------|
| Number                 | 5                   |
| Type                   | relay, ON/OFF       |
| Max. switching U and I | 250 VAC/24 VDC/10 A |
| Max. switching power   | 2500 VA/240 W       |
| Rate                   | 8 ms                |
| LED signalisation      | yes                 |

### TECHNICAL SPECIFICATION

|               |  |
|---------------|--|
| TC            | 50 ppm/ $^{\circ}$ C                     |
| Task          | 1 ms                                     |
| Communication | CANBUS with speed of 1 Mbit/at 40 meters |
| Watch-dog     | reset after 500 ms                       |
| Calibration   | at 25 $^{\circ}$ C and 40 % r.h.         |

### MECHANICAL PROPERTIES

|                     |                                      |
|---------------------|--------------------------------------|
| Material            | PA 66, incombustible UL 94 V-0, blue |
| Dimensions          | 36 x 91 x 60 mm                      |
| Mechanical fixation | on DIN rail 35 mm wide               |

### POWER SUPPLY

|                 |   |
|-----------------|---|
| Range           | 12...30 VDC/24 VAC, $\pm 10$ %, 5 VA, PF $\geq$ 0,4,<br>100...250 VDC/VAC, $\pm 10$ %, 5 VA, PF $\geq$ 0,4,<br>$t_{\text{STP}} < 40$ A/1 ms, isolated |
| Current via bus | max. 600 mA   |

### OPERATING CONDITIONS

|                       |  |
|-----------------------|--|
| Connection            | screw terminals, cross section < 2,5 mm $^2$   |
| Operating temperature | -20...+60 $^{\circ}$ C   |
| Storage temperature   | -20...+85 $^{\circ}$ C   |
| IP rating             | IP20   |
| Execution             | Safety class I   |
| El. safety            | EN 61010-1, A2   |
| Dielectric strength   | 4 kVAC for 1 min. between power and input/output<br>2,5 kVAC for 1 min. between bus and input/output |
| Isolation resistance  | for pollution degree II, measuring cat III<br>300 V (PI), 150 (DI)                                   |
| EMC                   | EN 61326-1 (Industrial environment)  |
| Seismic capacity      | IEC 980: 1993, art.6   |

\* PI - Primary Isolation, DI - Double Isolation

Power supply leads should not be in the vicinity of the low level input signal leads. Contactors, electrical motors and other power devices are not allowed near the input signal leads. Input signal leads (measured value) should be at a safe distance from all power lines and appliances. Even though this device has been successfully tested in accordance with international standards for use in industrial areas, we still recommend to adhere to the afore mentioned simple rules.

If the manufacturer is to assume the warranty conditions provided for the device's proper functionality it is essential that the shielding of the input signal wires is connected to the metal frame of the electrical switchboard!

# OMC 8020-2UNIC.5DOR

## CONNECTION

### OMC 8020-2UNIC.2DOR

**Connection of analogue inputs**

- DC:  $\pm 90/\pm 80$  mA  
PM:  $\pm 20/4...20$  mA
- DC:  $\pm 30/\pm 60/\pm 1000$  mV  
T/C: J/K/T/E/B/S/R/N/L (CJC can be activated only for Channel 1)
- DC:  $\pm 20/\pm 40/\pm 80$  V  
PM:  $\pm 2/\pm 5/\pm 10$  V
- DU: Linear potentiometer (min. 500  $\Omega$ )
- OHM: 0...0.1/0.3/3/30 k $\Omega$   
RTD: Pt 50/100/1 000  
Ni: Ni 1 000/10 000

**Connection digital outputs**

**STATUS Register**

|        |          |                                    |
|--------|----------|------------------------------------|
| 0x0040 | Init     | initialising                       |
| 0x00C0 | Init     | initialising                       |
| 0x0002 | Done0    | measurement in input 0 is complete |
| 0x0004 | Done1    | measurement in input 1 is complete |
| 0x0008 | Err.In0  | TC is disconnected in input 0      |
| 0x0010 | Err.In1  | TC is disconnected in input 1      |
| 0x0100 | Err.Und0 | underflow in input 0               |
| 0x0200 | Err.Ovr0 | overflow in input 0                |
| 0x0400 | Err.TUn0 | RTD/TC table underflow in input 0  |
| 0x0800 | Err.TOV0 | RTD/TC table overflow in input 0   |
| 0x1000 | Err.Und1 | underflow in input 1               |
| 0x2000 | Err.Ovr1 | overflow in input 1                |
| 0x4000 | Err.TUn1 | RTD/TC table underflow in input 1  |
| 0x8000 | Err.TOV1 | RTD/TC table overflow in input 1   |

**Return values**

|                 |  |
|-----------------|--|
| Main value      | Channels 0 and 1                                     |
| Auxiliary value | Channels 2 and 3                                     |
| Channel 2       | additional resistance 0                              |
| Channel 3       | additional resistance 1/temperature of cold junction |

**Value ranges**

|      |          |  |
|------|----------|--|
| Int  | 0 - 4095 | DC, PM, OHM, DU<br>10x TEMP RTD, Ni, T/C |
| Real | 0 - 1    | DC, PM, OHM, DU<br>TEMP RTD, Ni, T/C     |

Legend:  
■ Active inputs AI, "0"  
■ Active outputs DO  
■ Active inputs, "1" flashing > input overload

