



## OM 403UNI

- 3-color LED main display, auxiliary display and bargraph
- Multifunctional input (DC, PM, RTD, T/C, DU, Counter)
- Touch keys with haptic feedback and RGB backlighting
- Teach-in, Digital filters, Tare, Mat. function, Linearization
- DIN size 96 x 48 mm
- Power supply 10...30 V AC/DC or 80...250 V AC/DC

### Option


Comparators ● Data communication ● Analog output ● Data recording

The OM 403 series are 6-digit panel instruments designed for fast and easy setup, as well as accuracy and reliability.

The 403UNI is a multifunctional device that can be easily configured for a wide variety of input signals in the device menu. The setup and operation of the device are user-friendly, despite its versatility, by incorporating two displays, touch keys with color navigation and haptic feedback, as well as our Setup Wizard integrated into the meter.

The device is based on a 32-bit processor and a multi-channel 24-bit  $\Delta\Sigma$  ADC, which ensure high accuracy, stability and easy operation.

### UNIVERSAL INSTRUMENT

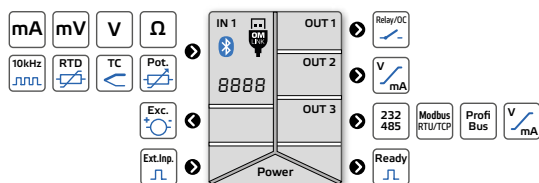

### CONTROLS

The device is controlled and set by either five touch keys located on the front panel or via a PC. For easier navigation of the device menu, the keys are backlit in different colors and provide haptic feedback when pressed.

Initial set up of the device is easily done using our Setup Wizard, which guides you step by step through the basic settings required to make the device operational.

There are two menu levels, USER and PROFI. The PROFI menu is password protected and it allows access to all menu items. If necessary, a narrowed down USER menu can be created using only selected items. These can be any items you select. You can also define each item as „view only“ or with „can be modified“ rights. USER menu is not password protected.

OM 403UNI can also be configured from a PC using our free OM Link software via USB-C or Bluetooth. This SW also lets you archive all settings, transfer them from one device to another, perform firmware updates and even device calibration.

All settings are stored in the EEPROM memory, so they are preserved even after the device is turned off.

### OPTIONS

**COMPARATORS (Relays or Open Collectors)** are designed to monitor two, three, four or six limit values. The user can select various output modes and functions to match specific operational requirements. Reaching one or more set limit values is indicated by signaling LEDs and by switching on/off the relevant output.

**DATA COMMUNICATION OUTPUTS** can transfer measured values to other display devices or directly to control systems with speed and accuracy. Galvanic isolated RS232 and RS485 interfaces are available, supporting ASCII, Modbus, Profibus and Profinet protocols.

**ANALOG OUTPUTS** are ideal for applications where further evaluation or processing of measured values in external devices is required. The galvanic isolated analog output is universal with the option of choosing the type and range - voltage or current.

**RECORDING OF MEASURED VALUES** is ideal for applications that require measured values to be analyzed retrospectively, or simply archived. Recording takes place in real time (RTC). Recording parameters (start and stop times as well as frequency) are user defined. In case of short-term events, recording can be continuous with writing speed equal to sampling rate. Data is stored either in the device's internal memory or on a USB-C flash drive.

### STANDARD FUNCTIONS

#### PROGRAMMABLE PROJECTION

**Selection:** user can choose from different types of inputs and measuring ranges

**Standard:** for both endpoints of the input range, any value can be set on the display, e.g. input 0...20 mA > 0...500.00

**Teach-In:** with this function, it is possible to assign any display values for the currently measured endpoints of the input signal, e.g. input 4.02...20.01 mA > 0...500.0

**Manual:** user can manually set the two endpoint values of the input signal and assign to them any display values, e.g. input 0.04...9.58 V > 0...700.0

**Overall projection:** -99999...999999

#### EXCITATION

**Fixed:** 24 VDC/1,2 W, it is suitable for powering sensors and converters

#### COMPENSATION

**Leads resistance (RTD, OHM):** automatic (3 and 4-wire) or manual in menu (2-wire)

**Probes (RTD):** internal resistance between actual sensor and its terminal block

**Cold junction (T/C):** manual or automatic (temperature of terminal block)

#### FUNCTIONS

**Linearization:** non-linear signal can be converted by up to 100-point linear interpol.

**Tare:** zeroing the display when the input signal is not zero

**Offset:** fixed offset of the initial value

**Min/max value:** registration of min./max. values reached during the measurement

**Peak value:** the display projects only the highest or the lowest measured value

**Mathematical functions:** polynomial, 1/x, logarithm, exponential, power, square root

**Simulation:** the device simulates its function without a connected input signal

**Log:** recording of events and error messages with a date and time stamp

#### DIGITAL FILTERS

**Floating / Exponential / Arithmetic average:** from 2 to 100 measurements

**Rounding:** setting the display step for the display

#### EXTERNAL CONTROL

**Hold:** stop measurement

**Lock:** locking out the buttons

**Tare:** activation and zeroing of tare

**Reset Min/Max:** reset the min/max value

**Hold Min/Max:** start the measurement to evaluate the Min/Max value

**Sample:** start of one-time measurement

**Data recording:** storage of measured values in the device memory

**Opening of a relay:** enabling a relay to disengage while in Permanent mode (safety relay)

## TECHNICAL DATA

### INPUT

No. of inputs	1 The range is adjustable in the instrument menu			
<b>DC</b> Range	+60 mV	> 10 MΩ	Input -mV	
	+75 mV	> 10 MΩ	Vstup -mV	
	+100 mV	> 10 MΩ	Vstup -mV	
	+150 mV	> 10 MΩ	Vstup -mV	
	+300 mV	> 10 MΩ	Vstup -mV	
	+1000 mV	> 10 MΩ	Vstup -mV	
	+20 V	1 MΩ	Vstup-U	
<b>PM</b> Range	+5 mA	< 200 mV	Vstup-I	
	+20 mA	< 200 mV	Vstup-I	
	4...20 mA	< 200 mV	Vstup-I	
	+2 V	1 MΩ	Vstup-U	
<b>OHM</b> Range	+5 V	1 MΩ	Vstup-U	
	+10 V	1 MΩ	Vstup-U	
	0...100 / 300 Ω	0...1 / 3 / 10 / 30 / 100 kΩ		
	0...300 kΩ (only 2- and 4-wire)			
Connection	2-, 3- and 4-wire, with broken cable/sensor detection			
<b>RTD</b> Range	Pt 100/500/1 000, 3 850 ppm/°C	-50°...450°C		
	Pt 100, 3 920 ppm/°C	-50°...450°C		
	Pt 50, 3 910 ppm/°C	-200°...1100°C		
	Pt 100, 3 910 ppm/°C	-200°...450°C		
Connection	2-, 3- and 4-wire, with broken cable/sensor detection			
<b>Ni</b> Range	Ni 1 000/10 000, 5 000 ppm/°C	-50°...250°C		
	Ni 1 000/10 000, 6 180 ppm/°C	-200°...250°C		
Connection	2-, 3- and 4-wire, with broken cable/sensor detection			
<b>Cu</b> Range	Cu 50/100, 4 260 ppm/°C	-50°...200°C		
	Cu 50/100, 4 280 ppm/°C	-200°...200°C		
Connection	2-, 3- and 4-wire, with broken cable/sensor detection			
<b>NTC</b> Range	NTC 1 2k2, B <sub>25/5</sub> = 3600	-40°...125°C		
	NTC 2 2k0, B <sub>25/5</sub> = 3528	-40°...125°C		
	NTC 3 10k, B <sub>25/5</sub> = 3435	-40°...125°C		
	NTC 4 10k, B <sub>25/5</sub> = 3977	-40°...125°C		
	NTC 5 12k, B <sub>25/5</sub> = 3740	-40°...125°C		
	NTC 6 20k, B <sub>25/5</sub> = 4263	-40°...125°C		
Connection	2-, 3- and 4-wire, with broken cable/sensor detection			
<b>PTC</b> Range	KTY 81/210	-55°...150°C		
Connection	2-, 3- and 4-wire, with broken cable/sensor detection			
<b>T/C</b> Range	J (Fe-CuNi)	-200°...900°C	RTD	
	K (NiCr-Ni)	-200°...1300°C		
	T (Cu-CuNi)	-200°...400°C	T/C	
	E (NiCr-CuNi)	-200°...690°C		
	B (PtRh30-PtRh6)	300°...1 820°C		
	S (PtRh10-Pt)	-50°...1 760°C		
	R (Pt13Rh-Pt)	-50°...1 740°C		
	N (OmegaGalloy)	-200°...1300°C		
	L (Fe-CuNi)	-200°...900°C		
	XX (Chromel-Copel)	-200°...800°C		
		with broken cable/sensor detection		
	CJC	adjustable -20°...99°C or automatic		
	<b>DU</b> Sensor power supply	1.65 VDC/3 mA, potentiometer resistance > 500 Ω		
<b>UC</b> Input	per contact, TTL, NPN/PNP			
Range	0,1 Hz...10 kHz <30 V			
Mode	counter/frequency, stopwatch, clock			
Setting	time base, multiplication/division constant			

### EXTERNAL INPUT

No. of inputs	3, on contact, PNP/NPN, < 30 V
Function	No function assigned Activation of Tare Reset of Tare Reset of Min./Max. values Open relay/OC (Type LATCH) Tare activation (*1s) → Zero Tare (>1s) Activation of Tech-In for Offset Controlling of cumulative measurement Measurement paused Take a one-off measurement Value of minimum * Value of maximum * Value of MAX-MIN* Hold - Average value* Device buttons blocked Data recording Deletes memory Show value of Channel A <sub>y</sub> , Kanál A* Show value of filtered channel A Show value of "Mathematic function"

\*The value is calculated from the period starting with the previous external input activation

### PROJECTION

Display	-99999...999999, 3-color 11-segment LED -99999...999999, green 11-segment LED
Digit height	14 mm and 7 mm
Display color	red / green / orange
Description	the bottom display or the last two characters of the main display
Bargraph	17 LEDs, orange colour
Brightness	adjustable or automatic

### INSTRUMENT SPECIFICATION

TC	25 ppm/°C
Accuracy	±0.07 % of FS ±0.05 % of FS ±0.1 % of FS DC, PM OHM - 100k/300k the specified accuracy applies to 20 measurements/s
Rate	1...400 measurement/s speed of 400 meas./s is with FFT signal filtering
Overload	10x (t < 30 ms), 2x
Comp. of conduct	< 30 Ω RTD
Accuracy CJC	±1.5°C T/C
Resolution	0.1°C / 1°C RTD / T/C
Control	5 touch keys backlight by LEDs and haptic feedback
Functions	Teach-in, tare, preset tare, peak value, min/max value, math. functions, delayed start, simulation exponential / floating / arithmetic average, rounding
Digital filters	
Math functions	polynomial / inverse polynomial / logarithm / exponential / power / root
Linearization	linear interpolation in 100 points setup only via OM Link
Data recording	15 ppm/°C, < 100k entries Long-term time-date-measured value One-off Fast < 400 measurements/s
OM Link	company communication interface for operation, setting and update of instruments (BT, microUSB)
Watch-dog	reset after 400 ms
Calibration	at 25°C and 40 % rh.

### RELAYS / OC OUTPUT

No. of outputs	up to 6
Type	digital, menu adjustable
Mode	RISE active above set value DROPP active below set value WINDOW active in the set window / band BATCH active in set periods
Function Relays/OC	SW. ON is closed in active mode SW. OFF is open in active mode PULSE switches on once in active mode LATCH in active mode the output is switched permanently, disconnection is blocked (IEC EN 61496) - disconnection is performed by ext. input
Limits	-99999...999999
Hysteresis	0...999999
Delay / Time	0...999.9 s
Outputs	2 - 4x relay with switching contact (Form C) (250 VAC/50 VDC, 3 A)* 3 - 6x relay with switch-on contact (Form A) (250 VAC/30 VDC, 3 A)* 3 - 6x open collector (30 VDC/100 mA)
Relays	1/8 HP 277 VAC, 1/10 HP 125 V, Pilot Duty D300 * values apply for resistance load

### ANALOG OUTPUTS

No. of outputs	1 or 2
Type	isolated, adjustable with 16-bit DAC, output type and range is selectable
TC	15 ppm/°C
Accuracy	±0.02 % of FS ±0.03 % of FS ±0.05 % of FS 0...5 V 0...2 V / 0...5 mA
Rate	response to change of value < 160 μs
Ranges	Range Error indication 0...2 V -2.2 V resistive load ≥ 1 kΩ 0...5 V -5.5 V resistive load ≥ 1 kΩ 0...10 V -11.0 V resistive load ≥ 1 kΩ ±10 V -11.0 V resistive load ≥ 1 kΩ 0...5 mA -5.5 mA compensation < 600 Ω/12 V 0...20 mA -22.0 mA compensation < 600 Ω/12 V 4...20 mA -3.2 mA compensation < 600 Ω/12 V Indication of broken current loop

### DATA COMMUNICATION

No. of outputs	1
Protocol	ASCII, Modbus RTU, Profibus DP, Profinet
Rate	600...230 400 Baud 9 600 Baud...12 Mbaud (Profibus)
Data format	Format 8bits + parity + stop bit Parity none / even / odd Stop bit 1/15/2
Addressing	1...247 instruments
Line termination	internim odporem 120 Ω DIP switch on the last device

### EXCITATION

Fixed	24 VDC, < 1.2 W, isolated
POWER SUPPLY	
Range	10...30 V AC/DC, PF ≥ 0.4, I <sub>isp</sub> < 40 A / 1 ms, isolated 80...250 V AC/DC, PF ≥ 0.4, I <sub>isp</sub> < 40 A / 1 ms, isolated Protection by fuse inside the device.
Consumption	< 9.4 W / 9.2 VA

### MECHANIC PROPERTIES


Material	Noryl GFN2 SE1, incombustible UL 94 V1, black
Dimensions	96 x 48 x 110 mm (w x h x d)
Panel cutout	90 x 45.5 mm (w x h)

### OPERATING CONDITIONS

Connection	connector terminal blocks, section < 1.5 / 2.5 mm <sup>2</sup>
Stabilization period	within 5 minutes after switch-on
Working temperat.	-20°...60°C
Storage temperat.	-20°...85°C
Working humidity	< 95 % r.v., non condensing
Protection	IP65, front panel only
Construction	safety class I
EL safety	EN 61010-1, A2
Dielectric strength	4 kVAC per 1 min test between supply and input 4 kVAC per 1 min test between supply and data/analog output 4 kVAC per 1 min test between input and relay output 2.5 kVAC per 1 min test between input and data/analog output
Insulation resist.*	for pollution degree II, measuring cat. III power supply, input > 670 V (PI), 300 (DI) input, output, excitation > 300 V (PI), 150 V (DI)
EMC	EN 61326-1, Industrial area EN IEC 62003.2021
RoHS	EN IEC 63000.2018
Seismic capacity	EN IEC/IEEE 60980-344 ed. 10.2020, par. 6, 9
Mechanical resistance	EN 60068-2-6 ed. 2.2008

\* PI - Primary insulation, DI - Double insulation

## CONNECTION

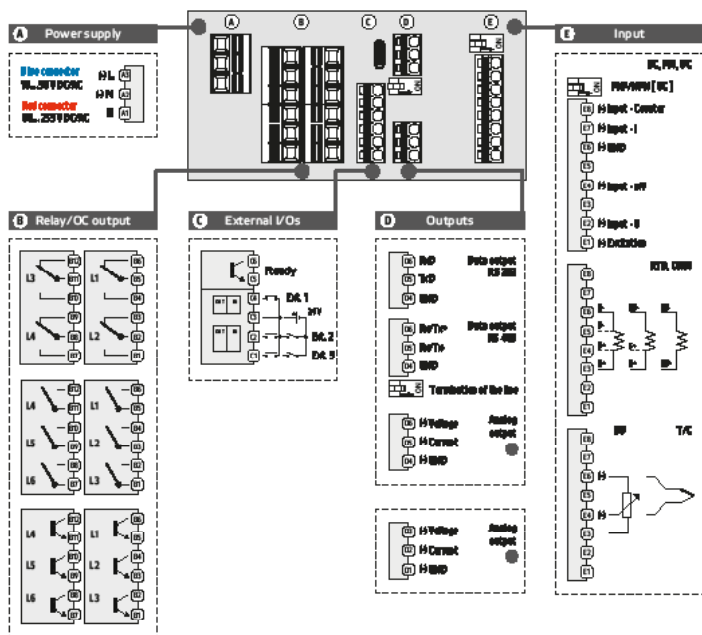

## ORDER CODE

### OM 403UNI

Power supply	10...30 V AC/DC 80...250 V AC/DC	0	
Comparators	no 2x relay (Form C) 4x relays (Form C) 3x relays (Form A) 6x relays (Form A) 3x open collectors 6x open collectors	0 1 2 3 4 5 6	
Analog output	no yes	0 1	
Data communication	no RS 232 RS 485 Modbus Profibus Second analog output	0 1 2 3 4 9	
Recording of measured values	no yes	0 1	
Specification	customized version, do not fill in		00

Basic configuration of the instrument is indicated in bold.