


# 1. DESCRIPTION



#### DESCRIPTION

The OMX 38 model series are transmitters to DIN rail, which are manufactured in the following alternatives:

OMX 38DC	DC input ⇒ analog output
OMX 38AC	AC input ⇒ analog output
OMX 38W	Power ⇒ analog output
OMX 38RTD	Pt 100 ⇔ analog output
OMX 38DU	Linear poten. ⇒ analog output
OMX 38OHM	Resistance ⇒ analog output

The instrument id based on a simple analog converter, which secures good accuracy and stability. The transmitter is in a plastic DIN box with terminal board to rail of 35 mm in width.

Transmitter power supply (230 VAC), input and output signal have galvanic separation with isolation voltage 300 V.

### OPERATION

The instrument is designed for simple measurement without further control.

#### CALIBRATION


Contingent corrections may be perfored by a trimmer from the front of the instrument within the range of approx  $\pm 2$  %.

## 2. CONNECTION


The lead for feeding the instrument should not be in the proximity of the incoming low-potential signals. Contactors, motors with larger input power and other efficient elements should not be in the proximity of the instrument.

The lead into the input of the instrument (the measured quantity) should be in sufficient distance from all power leads and appliances. Provided this cannot be secured it is necessary to use shielded leads with connection to ground. The instruments are tested in compliance with standards for use in industrial ara, yet we recommend to abide by the above mentioned principles.

Grounding on terminal "E" has to be connected at all times.

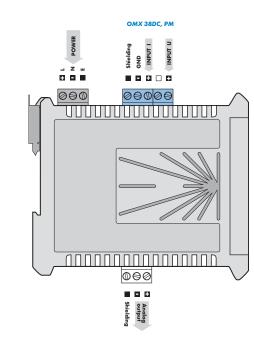

00000

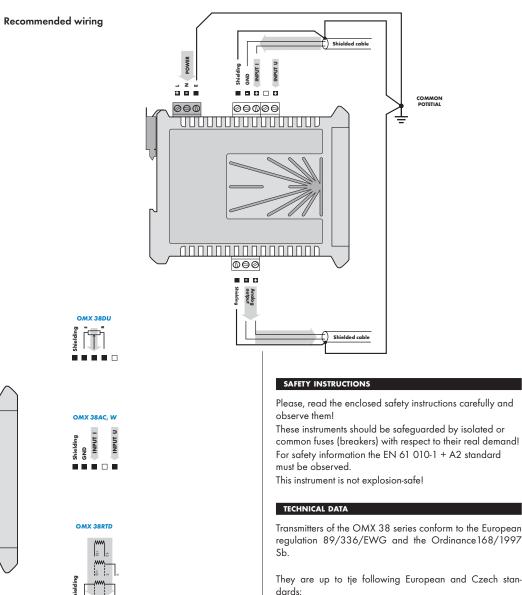

EN 55 022, class B EN 61000-4-2, -4, -5, -6, -8, -9, -10, -11

The instrument is applicable for unlimited use in agricultural and industrial areas.

## **TECHNICAL DATA**

Measuring range			
the range is fixed, a	according to order		DC
Input:	±10 mV10 V	0,5 MOhm	Input 2
	±10 V450 V	1 MOhm	Input 2
	±05 A	< 200 mV	Input 1
For larger ranges it	is necessary to use e	xternal divider or shunt.	
the range is fixed, c	according to order		AC
Input:	60 mV450 V	1 MOhm	Input 2
	05 A	< 400 mV	Input 1
Frequency range:	02 500 Hz		
For larger ranges it	is necessary to use e	xternal divider or shunt.	
the range is fixed, a	according to order		РМ
	02 V	0,5 MOhm	Input 2
	05 V	0,5 MOhm	Input 2
	010 V	0,5 M0hm	Input 2
	05 mA	< 400 mV	Input 1
	020 mA	< 400 mV	Input 1
	420 mA	< 400 mV	Input 1
the range is fixed, a	according to order		W
Input:	0450 V	1 MOhm	Input U
	05 A	< 400 mV	Input I
Frequency range:	0600 Hz, upon 1	request 20 000 Hz	
For larger ranges it	is necessary to use ex	xternal divider or shunt.	
the range is fixed, a	according to order		RTD
Range:	-50°850°C		
Туре:	Pt 100 - 3 860 pp	m/°C	
	Pt 1 000 - 3 860 p	Pt 1 000 - 3 860 ppm/°C Ni 1 000 - 5 000 ppm/°C	
	Ni 1 000 - 5 000 j		
Connection:	2, 3 or 4 wire		
the range is fixed, a			DU
Lin. potentiometer:			
Pot. power supply:			
the range is fixed, a	according to order		онм
Input:	0,1100 kOhm		
Connection:	2, 3 or 4 wire		
Instrument accure	1 <b>C</b> Y		
Accuracy:	±0,1 % of range		DC

0,1100 kOhm	
2, 3 or 4 wire	
cv	
,	
±0,1 % of range	DC
±0,3 % of range	AC, W
±0,2 % of range	RTD, OHM
continuous measurement	
2x (long-term) not for 5 A and 300 V	
at 23°C and 40 % r.h.	
	2, 3 or 4 wire 5y ±0,1 % of range ±0,3 % of range ±0,2 % of range continuous measurement 2x (long-term) not for 5 A and 300 V

Outputs			5.
Analog:	isolated, fixly preset		
TC: Rate:	100 ppm/°C response to change of value < 1 ms		Compo
Kult.	response to change of value < 1 ms		•
DC, PM, DU			
Voltana	response to change of value < 1 s	and 1 1/0hm)	
Voltage: Current:	02 V; 5 V; 10 V, upon request ±10 V (max.l 0/420 mA; upon request ±20 mA, 05 m/		Manuf
contrain.	- compensation of conduct up to 500 Ohm		
Corrugation:	5 mV of residual corrugation upon input sign	al 10 V	
Power supply			declare
i onor soppiy	24/110/230 VAC, 50/60 Hz, ±10 %, 3 VA		meets
	1030 VDC/max. 150 mA, isolated		the ter and the
	- power supply is safeguarded by a fu	use inside the	produc
	instrument		to the r
Mechanic propertie	۰ <b>۲</b>		appurte
Material:	PA 66S (UL 94-VO), blue		Produ
Dimensions:	113 x 97 x 22 mm		Model
Installation:	to DIN rail, width 35 mm		Versio
Operating condition	ns		Assessr
Connection:	connector terminal board - conductor section	up to 2.5 mm <sup>2</sup>	No. 22
Stabilization period:	within 15 minutes after switch-on		
Working temperature			<u>Confor</u>
Storage temperature:			el.safet
Cover: Construction:	IP20 safety class II		01.50101
	300 V/60 V (AC/DC supply)		EMC:
El. safety:	EN 61010-1, A2		
Overvoltage category	for pollution degree II		
	II instrument power supply (300 V)		
FMC.	II input, output (300 V)		
EMC:	see Declaration of conformity		
4. INST	RUMENT DIMENSIO	NS	
Front view	Side view		
T	<u></u>		
G			and Or
			el. safe
97 mr		-	EMC:
- •		<u>ין א</u>	
			As evi
	Ŭ		organis VTÚE F
	<u> </u>		VTÚPV
			ČIA
Installation to DIN rail of 35	mm width		

● Upon installation of the transmitter we recommend to secure airflow along the side walls.

# 5. DECLARATION OF CONFORMITY

ORBIT MERRET, spol. s r.o. Company: Klánova 81/141, 142 00 Prague 4 Czech Republic IČO: 00551309

Manufacturer: ORBIT MERRET, spol. s r.o. Vodňanská 675/30, 198 00 Prague 9 Czech Republic

declares at its full responsibility that the product presented hereunder meets all technical requirements, is safe for use when used under the terms and conditions determined by Orbit Merret, spol,s r.o. and that our company has taken all steps to ensure conformity of all products of the type referred-to below, which are being brought out to the market, with technical documentation and requirements of the appurtenant Ordinance.

Product: Analog transmitter Model: **OMX 38** Version: DC, PM, DU, PWR, OHM, RTD, T/C

Assessment of conformity pursuant to Section 12, par. 4 b, d of Act No. 22/1997 Coll.

### Conformity is assessed pursuant to the following standards:

el.safety EN 61010-1

> EN 50131-1, chapt. 14 and chapt. 15 EN 50130-4, chapt. 7, EN 61000-4-11 EN 50130-4, chapt. 8, EN 61000-4-11 EN 50130-4, chapt. 9, EN 61000-4-2 EN 50130-4, chapt. 10, EN 61000-4-3 EN 50130-4, chapt. 11, EN 61000-4-6 EN 50130-4, chapt. 12, EN 61000-4-4 EN 50130-4, chapt. 13, EN 61000-4-5 EN 50130-5, chapt. 20 prEN 50131-2-1, article 9.3.1 EN 61000-4-8 EN 61000-4-9 EN 61000-3-2 ed. 2:2001 EN 61000-3-3: 1997, Cor.1: 1998, Z1: 2002 EN 55022, chapt. 5 and chapt. 6

and Ordinance

č. 168/1997 Coll el. safety EMC: č. 169/1997 Coll

As evidence serve the protocols of authorised and accredited organisations:

VTÚE Praha, examination laboratory No. 1158, accredited by ČIA VTÚPV Vyškov, examination laboratory No. 1103, accredited by ČΙΑ

In Prague, December 18, 2003

Miroslav Hackl v.r. the Executive

## 6. CERTIFICATE OF GUARANTEE

Product:	OMX 38	DC AC	W RTD	DU OHM
Туре:				
Manufact.No.:				_
Date of sale:		<u> </u>		
For this instrumer	at applies a c	warantoo	pariad a	f 24 months

For this instrument applies a guarantee period of 24 months of the date of sale to the user.

Defects occuring during this period due to manufacturing error or due to material faults shall be eliminated free of charge.

For instrument quality, function and construction the guarantee shall apply provided the instrument was connected and used accurately in compliance with the instructions for use.

The guarantee does not apply to defects caused by:

- mechanical damage - transportation

- intervention of unqualified person including the user

- irreversible event

- other unprofessional interference

The manufacturer performs guarantee and post-guarantee repairs unless provided for othervise.





ORBIT MERRET, spol. s r.o. Vodňanská 675/30 198 00 Praha 9

Tel.: +420 281 040 200 Fax: +420 281 040 299 e-mail: orbit@merret.cz www.orbit.merret.cz TECHDOK - OMX 38 - 2004 - v.2.0 - en