


**Transducer
Pivot head mounting
potentiometric
up to 750 mm, IP67**

Series LWX
Model 004
Shaft protected

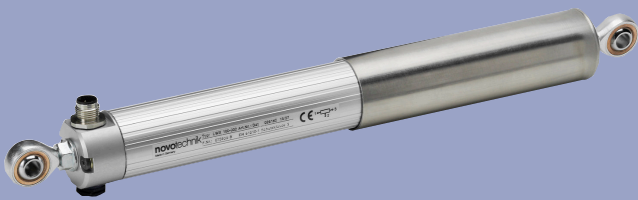

Designed for extreme operating environments, the LWX series features an all-metal construction and a pressure compensation technology to prevent buildup that could degrade operation in mechanical, vehicle, automation and robotic applications where an extended operating life is essential.

Special features

- protection class IP67
- all-metal housing with shaft protection
- corrosion resistant
- differential pressure compensation system with GORE membrane - compensates for pump effect of push rod movement
- high vibration resistance
- suitable for harsh environmental conditions (humidity, oil, dust)
- double beared actuating rod
- mountable via low-backlash pivot heads with a large angle of free movement (up $\pm 12.5^\circ$)
- outstanding linearity up to $\pm 0.04\%$
- resolution better than 0.01 mm
- long life up to 50 million movements, depending on application
- cable or connector version available
- version IP65 see data sheet LWG
- version without shaft protection see data sheet LWX, model 003




Applications

- steering cylinders in mobile machines
- building equipment
- machines in the media-polluted environment (e.g. production of concrete fabricated components)

These rugged position transducers provide direct, absolute measurement of displacement or length.

A free-pivot-head mounted on the actuating rod eliminates backlash guaranteeing high accuracy.

| Description | |
|------------------------|---|
| Housing | aluminium, anodized |
| Mounting | Pivot Head Mounting (Stainless steel pivot heads on request) |
| Actuating rod | stainless steel (1.4305), rotatable |
| Bearings | metal-polymer slide bearing |
| Resistane element | conductive plastic |
| Wiper assembly | precious metal multi-finger wiper, elastomer damped |
| Electrical connections | 4-pin round connector, M12x1 or 3-wire PVC-cable, 3x0.5 mm ² (AWG 20), shielded, 1 m length |

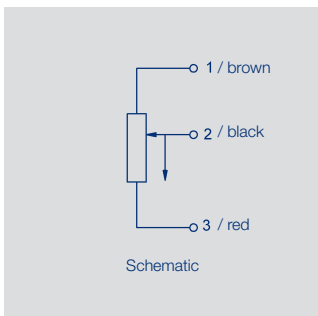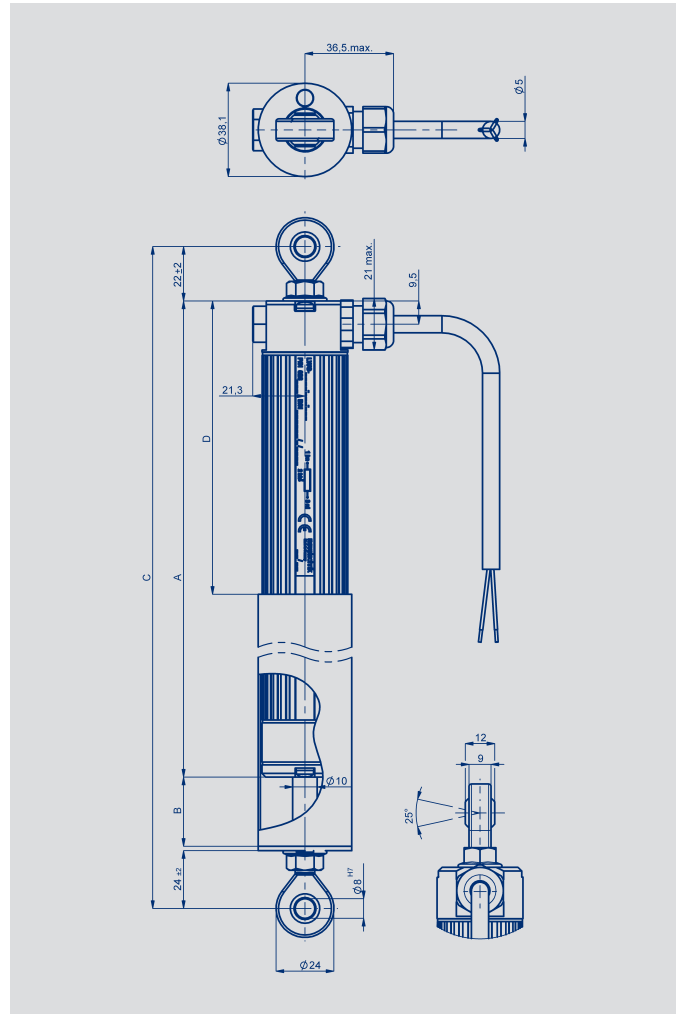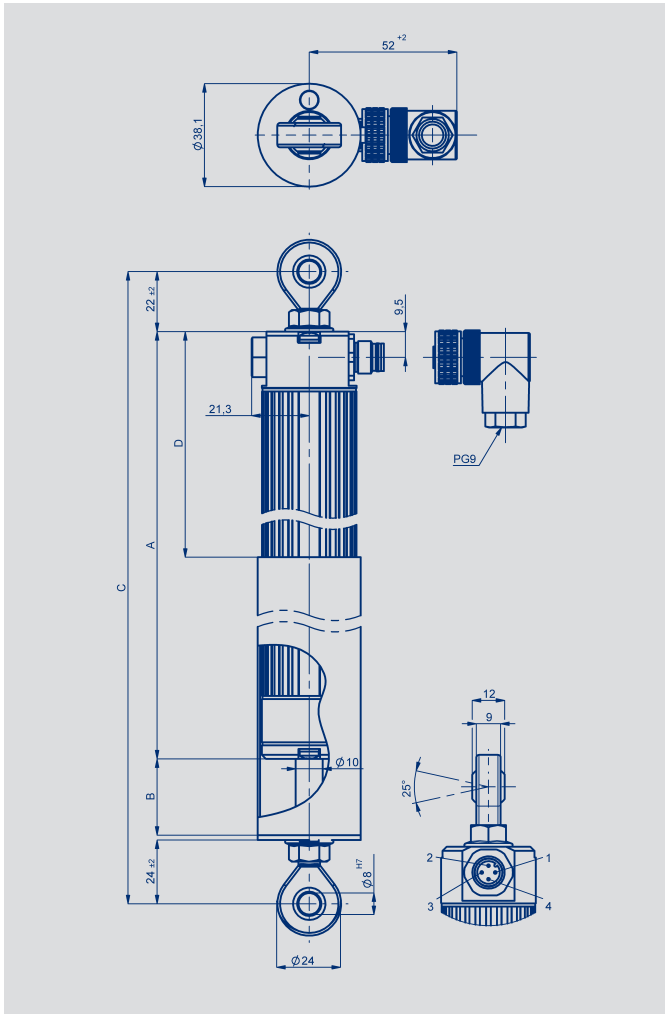

| Type designations | LWX 0050 | LWX 0075 | LWX 0100 | LWX 0150 | LWX 0175 | LWX 0225 | LWX 0250 | LWX 0300 | LWX 0360 | LWX 0450 | LWX 0500 | LWX 0600 | LWX 0750 | |
|--|------------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|---------------|
| Electrical Data | | | | | | | | | | | | | | |
| Defined electrical range | 50 | 75 | 100 | 150 | 175 | 225 | 250 | 300 | 360 | 450 | 500 | 600 | 750 | mm |
| Electrical stroke | 52 | 77 | 102 | 152 | 178 | 229 | 254 | 305 | 366 | 457 | 508 | 610 | 762 | mm |
| Nominal resistance | 2 | 3 | 3 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 5 | 10 | kΩ |
| Resistance toleranz | 20 | | | | | | | | | | | | | ± % |
| Independent linearity | 0.2 | 0.1 | 0.1 | 0.08 | 0.07 | 0.07 | 0.07 | 0.06 | 0.05 | 0.05 | 0.05 | 0.05 | 0.04 | ± % |
| Repeatability | 0,01 | | | | | | | | | | | | | mm |
| Recommended operating wiper current | ≤1 | | | | | | | | | | | | | μA |
| Max. wiper current in case of malfunction | 10 | | | | | | | | | | | | | mA |
| Max. permissible applied voltage | 42 | | | | | | | | | | | | | V |
| Effective temperature coefficient of the output-to-applied voltage ratio | typical 5 | | | | | | | | | | | | | ppm/K |
| Insulation resistance (500 VDC) | ≥ 10 | | | | | | | | | | | | | MΩ |
| Dielectric strength (500 VAC, 50 Hz) | ≤ 100 | | | | | | | | | | | | | μA |
| Mechanical Data | | | | | | | | | | | | | | |
| Body length (dimension A) | 176 | 201 | 227 | 277 | 303 | 354 | 379 | 430 | 505 | 619 | 684 | 810 | 994 | ± 2 mm |
| Mechanical stroke (dimension B) | 54 | 79 | 105 | 155 | 181 | 231 | 257 | 307 | 368 | 460 | 510 | 612 | 764 | ± 2 mm |
| Minimum distance between pivot heads, nominal (dimension C) | 224 | 249 | 275 | 325 | 351 | 402 | 427 | 478 | 553 | 667 | 732 | 858 | 1042 | mm |
| Open housing area (dimension D) | 84 | 90 | 90 | 90 | 90 | 90 | 90 | 90 | 103 | 126 | 141 | 164 | 196 | ± 2 mm |
| Weight with connector approx. | 413 | 453 | 493 | 573 | 613 | 693 | 733 | 832 | 1023 | 1167 | 1247 | 1407 | 1647 | g |
| Operating force | | | | | | | | | | | | | | |
| horizontal | typical 50 | | | | | | | | | | | | | N |
| vertical | typical 50 | | | | | | | | | | | | | N |
| Tearing force | | | | | | | | | | | | | | |
| horizontal | 150 *) | | | | | | | | | | | | | N |
| Environmental Data | | | | | | | | | | | | | | |
| Temperature range | -30...+100 | | | | | | | | | | | | | °C |
| Operating humidity range | 0... 95 (no condensation) | | | | | | | | | | | | | % R.H. |
| Vibration | 5...2000 Amax =0.75 amax =20 | | | | | | | | | | | | | Hz mm g |
| Shock | 50 11 | | | | | | | | | | | | | g ms |
| Life | >50 x 10 ⁶ typical | | | | | | | | | | | | | movements |
| Operating speed | 5 | | | | | | | | | | | | | m/s max. |
| Protection class | IP 67 (DIN EN 60529), also dynamic | | | | | | | | | | | | | |

*) Depending on the environmental temperature and standstill time, the necessary force for the initial operating of the push rod can increase.



| Order designations (connector version) * | | Order designations (cable version) * | |
|--|--------|--------------------------------------|--------|
| Typ | P/N | Typ | P/N |
| LWX-0050-004-101 | 026502 | LWX-0050-004-201 | 026602 |
| LWX-0075-004-101 | 026503 | LWX-0075-004-201 | 026603 |
| LWX-0100-004-101 | 026504 | LWX-0100-004-201 | 026604 |
| LWX-0150-004-101 | 026506 | LWX-0150-004-201 | 026606 |
| LWX-0175-004-101 | 026507 | LWX-0175-004-201 | 026607 |
| LWX-0225-004-101 | 026509 | LWX-0225-004-201 | 026609 |
| LWX-0250-004-101 | 026510 | LWX-0250-004-201 | 026610 |
| LWX-0300-004-101 | 026512 | LWX-0300-004-201 | 026612 |
| LWX-0360-004-101 | 026514 | LWX-0360-004-201 | 026614 |
| LWX-0450-004-101 | 026518 | LWX-0450-004-201 | 026618 |
| LWX-0500-004-101 | 026520 | LWX-0500-004-201 | 026620 |
| LWX-0600-004-101 | 026524 | LWX-0600-004-201 | 026624 |
| LWX-0750-004-101 | 026530 | LWX-0750-004-201 | 026630 |

*) Stainless steel pivot heads on request

Important

All values specified in this data sheet for linearity, lifetime and temperature coefficient are only valid for a sensor used as a voltage divider with virtually no load applied to the wiper ($I_e < 1 \mu A$).



Included in delivery (connector version)

M12x1 female connector, angled, with coupling nut, screw termination, $4 \times 0.75 \text{ mm}^2$, cable diameter 6 ... 8 mm, IP67, not shieldable, EEM 33-89



Recommended accessories

M12x1 female connector, 4-pin, angled, with molded cable, shielded, $4 \times 0.34 \text{ mm}^2$, IP67, open ended: length 2 m, EEM 33-33, P/N 005601; length 5 m, EEM 33-63, P/N 005610; length 10 m, EEM 33-99, P/N 005696. (other versions see data sheet Accessories M12-connection system)



Recommended accessories

Conversion kit: stainless steel version of pivot heads P/N 108551 Z-G-03



Recommended accessories

Process-controlled indicators MAP... with display, Signal conditioner MUP... / MUK ... for standardized output signals.