



- 5-DIGIT PROGRAMMABLE PROJECTION
- MATHEMATIC FUNCTIONS, DIGITAL FILTERS, TARE
- ACCURACY 0,02 % S RATE: 100 MĚŘ./S
- SIZE OF DIN 96 X 48 MM
- POWER SUPPLY 80...250 V AC/DC
- Option
 - Excitation • Comparators • Data output • Analog output
 - Data record • Power supply 10...30 V AC/DC

OPERATION

The instrument is set and controlled by five control keys located on the front panel. All programmable settings of the instrument may be performed in three adjusting modes:

LIGHT MENU is protected by optional number code and contains solely items necessary for instrument setting

PROFI MENU is protected by optional number code and contains complete instrument setting

USER MENU may contain arbitrary items from the programming menu (LIGHT/PROFI), which determine the right (see, change). Access w/o password.

Standard equipment is the OM Link interface, which together with operation program enables modification and filing of all instrument settings as well as perform firmware updates (with OML cable). The program is also designed for visualization and filing of measured values from more instruments.

All settings are stored in the EEPROM memory (they hold even after the instrument is switched off). The measured units may be projected on the display.

OPTION

EXCITATION is suitable for feeding of sensors and transmitters. It is isolated, with continuously adjustable value in the range of 2...24 VDC.

COMPARATORS are assigned to monitor one, two, three or four limit values with relay output. The user may select limits regime: LIMIT/DOSING/FROM-TO. The limits have adjustable hysteresis within the full range of the display as well as selectable delay of the switch-on in the range of 0...99,9 s. Reaching the preset limits is signalled by LED and simultaneously by the switch-on of the relevant relay.

DATA OUTPUTS are for their rate and accuracy suitable for transmission of the measured data for further projection or directly into the control systems. We offer an isolated RS232 and RS485 with the ASCII/MESSBUS/MODBUS/PROFIBUS protocol.

ANALOG OUTPUTS will find their place in applications where further evaluating or processing of measured data is required in external devices. We offer universal analog output with the option of selection of the type of output - voltage/current. The value of analog output corresponds with the displayed data and its type and range are selectable in menu.

MEASURED DATA RECORD is an internal time control of data collection. It is suitable where it is necessary to register measured values. Two modes may be used. FAST is designed for fast storage (80 records/s) of all measured values up to 8 000 records. Second mode is RTC, where data record is governed by Real Time with data storage in a selected time segment and cycle. Up to 266 000

OM 502

OMLINK

The OM 502 model series are 5-digit panel programmable instruments.

The instrument is based on an 8-bit microcontroller with a multichannel 24-bit sigma-delta converter, which secures high accuracy, stability and easy operation of the instrument.

OM 502DC

DC VOLTMETER AND AMMETER

OM 502PM

PROCESS MONITOR

OM 502I

INTEGRATOR

OM 502LX

LINEARIZER

OM 502DU

DISPLAY UNIT FOR LINEAR POTENTIOMETERS

OM 502T

WEIGHING INDICATOR

values may be stored in the instrument memory. Data transmission into PC via serial interface RS232/485 and OM Link.

STANDARD FUNCTIONS

PROGRAMMABLE PROJECTION

Setting (UNI): manual, in menu optional projection on the display may be set for both limit values of the input signal, e.g. input 0...300,0 V ⇒ 0...450,0

Projection: -99999...999999

Weighing function (T): manual or automatic calibration, signalization of stabilized equilibrium, zero stabilization, automatic zero monitoring, defined number of segments on the scale

Projection (T): ±99999 (Mode - Standard)

Selection of segment size (T): 0,001/.../0,1/0,2/0,5/1/2/5/10/20/50/100 (Mode - WEIGHT)

LINEARIZATION

Linearization: by linear interpolation in 50 points (solely via OM Link)

Linearization (LX): by linear interpolation in 256 points and 16 tables

DIGITAL FILTERS

Floating/Exp./Arithmetic average: from 2...30/100/100 measurements

Rounding: setting the projection step for display

MATHEMATIC FUNCTIONS

Min/max. value: registration of min/max. value reached during measurement

Tare: designed to reset display upon non-zero input signal

Fixed tare (T): firmly preset tare

Peak value: the display shows only max. or min. value

Mat. operations: polynome, 1/x, logarithm, exponential, power, root, sin x

EXTERNAL CONTROL*

Lock: control keys blocking

Hold: display/instrument blocking

Tare: tare activation

Resetting MM: resetting min/max value

TECHNICAL DATA

PROJECTION

Display: -99999...999999, red or green 14-segment LED, digit height 14 mm

Description: last two characters on the display may be used for description of measured quantities (adjustable in the menu)

Decimal point: setting - in menu

Brightness: setting - in menu

INSTRUMENT ACCURACY

TK: 50 ppm/°C

Accuracy: ±0,02% of range + 1 digit (for projection 99999 and 10 m/s) ±0,1% of range + 1 digit **DC (5 A)**

±0,05% of range + 1 digit **DC (1 A), DU, T**

Rate: 1...100 meas/s; 0,1...8 meas/s (I),

Overload capacity: 10x (t < 30 ms) - not for 300 V and 5 A; 2x

Time base (I): 1 s (for integration)

Linearization: by linear interpolation in 50 points

Linearization (LX): by linear interpolation in 256 points/16 tab.

Digital filters: Exp./Floating/Arithmetic average, Rounding

Functions: offset, Min/max value, Tare, Peak value, Mat. operations

Ext. control: HOLD, LOCK, Reset Min/Max, Tare

Data record: measured data record into instrument memory

RTC: -15 ppm/°C, time-date-display value, < 266k data

FAST: - display value, < 8k data

Watch-dog: reset after 0,4 s

QM Link: Company communication interface for operation, setting and update of instruments

Calibration: at 25°C and 40% rh.

COMPARATOR

Type: digital, setting in menu, contact switch < 30 ms

Limits: -99999...99999

Hysteresis: 0...9999

Delay: 0...99,9 s

Output: 2x relays Form A (250 VAC/30 VDC, 3 A)

and 2x Form C relays (250 VAC/50 VDC, 3 A), 2x/4x open collectors, 2x SSR, 2x bistable relays

DATA OUTPUT

Protocol: ASCII, MESSBUS, MODBUS - RTU, PROFIBUS

Data format: 8 bit + no parity + 1 stop bit (ASCII)

7 bit + even parity + 1 stop bit (Messbus)

Rate: 600...230 400 Baud

9 600 Baud...12 Mbaud (PROFIBUS)

RS 232: isolated

RS 485: isolated, addressing (max. 31 instruments)

ANALOG OUTPUT

Type: isolated, programmable with 12-bit D/A converter, type and range are selectable in programming mode

Non-linearity: 0,1% of range

TK: 15 ppm/°C

Rate: response to change of value < 1 ms

Ranges: 0...2/5/10 V, ±10 V, 0...5 mA, 0/4...20 mA (comp. < 500 0/12 V or 1 000 0/24 V)

EXCITATION

Adjustable: 5...24 VDC/max. 1,2 W, isolated

Fixed: 10 VDC, max. load 80 Ω **T**

POWER SUPPLY

10...30 V AC/DC, ±10%, max. 13,5 VA, PF ≥ 0,4, I_{STP} < 40 A/1 ms

80...250 V AC/DC, ±10%, max. 13,5 VA, PF ≥ 0,4, I_{STP} < 40 A/1 ms

Power supply is protected by a fuse inside the instrument

MECHANIC PROPERTIES

Material: Noryl GFN2 SE1, incombustible UL 94 V-1

Dimensions: 96 x 48 x 120 mm

Panel cutout: 90,5 x 45 mm

OPERATING CONDITIONS

Connection: connector terminal board, section < 1,5/2,5 mm²

Stabilization period: within 15 minutes after switch-on

Working temperature: -20...60°C

Storage temperature: -20...85°C

Cover: IP64 (front panel only)

El. safety: EN 61010-1, A2

Dielectric strength: 4 kVAC after 1 min between supply and input

4 kVAC after 1 min between supply and data/analog output

4 kVAC after 1 min between supply and relay output

2,5 kVAC after 1 min between input and data/analog output

Insulation resistance: for pollution degree II, measuring cat. III.

Power supply > 670 V (ZI), 300 V (DI)

input, output, Exc. > 300 V (ZI), 150 V (DI)


EMC: EN 61326-1

PI - Primary insulation, DI - Double insulation

MEASURING RANGES

	DC	PM	I	LX	DU	T
w/o					potentiometer > 500 Ω	
A	±99,999 mV	0...5 mA	0...5 mA	0...5 mA		1...4 mV/V
B	±999,99 mV	0...20 mA	0...20 mA	0...20 mA		2...8 mV/V
C	±9,9999 V	4...20 mA	4...20 mA	4...20 mA		4...16 mV/V
D	±99,999 V	±2 V	±2 V	±2 V		
E	±300,00 V	±5 V	±5 V	±5 V		
F		±10 V	±10 V	±10 V		
K	±999,99 µA					
L	±9,9999 mA					
M	±99,999 mA					
N	±999,99 mA					
P	±5,0000 A					
Z	on request	on request	on request	on request		

CONNECTION

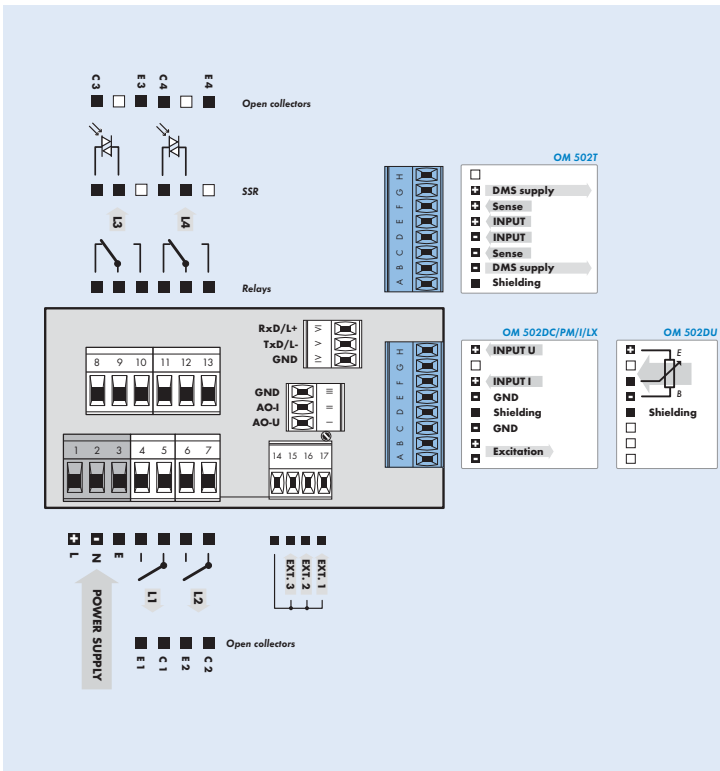

ORDER CODE

OM 502

Type

D	C													
P	M
I	
L	X
D	U
T	

Order code shall not include blank spaces!

Power supply	10...30 V AC/DC 80...250 V AC/DC	0 1													
Measuring range, see table „Measuring ranges“		?													
Comparators	none 1x relay (Form A) 2x relays (Form A) 3x relays (2x Form A + 1x Form C) 4x relays (2x Form A + 2x Form C)	0 1 2 3 4 5 6 7 8 9 A B													
Data output	none (for Type „LX“ always in standard) RS 232 RS 485 MODBUS PROFIBUS	0 1 2 3 4													
Analog output	no yes (Compensation < 500 Ω/12 V) yes (Compensation < 1 000 Ω/24 V)	0 1 2													
Excitation	no yes	0 1													
Data record	no RTC FAST	0 1 2													
Display color	red green	1 2													
Other	customer version, do not fill in														00

Default execution is shown in bold

* Launch for sale has not been set