

OM 602UQC



OM 602UQC UNIVERSAL COUNTER

- 6-digit programmable projection
- 2x counter UP/DOWN, 2x IRC
- Mat.functions, Digital filter, Tare, Preset, Sum
- Size of DIN 96 x 48 mm
- Power supply 80...250 V AC/DC

OMLINK

Options

- Excitation • Comparators • Data output • Analog output • Data record
- Time backup • Power supply: 10...30 V AC/DC

Data outputs are for their rate and accuracy suitable for transmission of the measured data for further projection or directly into the control systems. We offer an isolated RS232 and RS485 with the ASCII/MESSBUS/MODBUS/PROFIBUS protocol.

Analog outputs will find their place in applications where further evaluating or processing of measured data is required in external devices. We offer universal analog output with the option of selection of the type of output - voltage/current. The value of analog output corresponds with the displayed data and its type and range are selectable in menu.

Measured data record is an internal time control of data collection. It is suitable where it is necessary to register measured values. Two modes may be used. FAST is designed for fast storage (80 records/s) of all measured values up to 8 000 records. Second mode is RTC, where data record is governed by Real Time with data storage in a selected time segment and cycle. Up to 131 000 values may be stored in the instrument memory. Data transmission into PC via serial interface RS232/485 and OM Link.

Time backup is suitable where time needs to be measured even in case of supply voltage outage (upon power supply outage the instrument does not display)

Description

OM 602UQC is a universal 6 digit panel programmable dual-channel impulse counter/frequency meter/evaluation of signal from IRC sensors and timer/clock.

The instrument is based on an 8-bit processor that secures high accuracy, stability and easy operation of the instrument.

Operation

The instrument is set and controlled by five control keys located on the front panel. All programmable settings of the instrument may be performed in three adjusting modes :

Light menu is protected by optional number code and contains solely items necessary for instrument setting

Profi menu is protected by optional number code and contains complete instrument setting

User menu may contain arbitrary items from the programming menu (LIGHT/PROFI), which determine the right (see, change). Access w/o password.

Standard equipment is the OM Link interface, which together with operation program enables modification and filing of all instrument settings as well as perform firmware updates (with OML cable). The program is also designed for visualization and filing of measured values from more instruments.

All settings are stored in the EEPROM memory (they hold even after the instrument is switched off).

The measured units may be projected on the display.

Options

Excitation is suitable for feeding of sensors and transmitters. It is isolated, with continuously adjustable value in the range of 5...24 VDC.

Comparators are assigned to monitor one, two, three or four limit values with relay output. The user may select limits regime: LIMIT/DOSING/FROM-TO. The limits have adjustable hysteresis within the full range of the display as well as selectable delay of the switch-on in the range of 0...99,9 s. Reaching the preset limits is signalled by LED and simultaneously the relevant relay.

Standard functions

PROGRAMMABLE PROJECTION

Input: NPN, PNP, upon contact, IRC, line

Measuring modes: counter/frequency meter/UP-DW counter + frequency/counter for IRC + frequency

Calibration: calibration coefficient for each channel may be set in menu independently

Projection: -99999...999999 with fixed or floating DP in format 10/24/60

Measuring channels: A and B, from one or more measuring inputs two independent functions may be evaluated

Time base: 0,05/0,5/1/2/5/10/20/50/100 s

LINEARIZATION

Linearization: by linear interpolation in 50 points (solely via OM Link)

FUNCTIONS

Preset: initial non-zero value, which is always read after resetting the instrument to zero

Summation: registration of the number upon shift operation

Pre-division constant: 1/10/60/100/1000/3600

DIGITAL FILTERS

Input filter: lets through input signal up to 10...2000 Hz

Exponen. average: from 2...255 measurements

Rounding: setting the projection step for display

MATHEMATIC FUNCTIONS

Min/max. value: registration of min/max. value reached during measurement

Tare: designed to reset display upon non-zero input signal

Peak value: the display shows only max. or min. value

Mat. operations: polynome, 1/x, logarithm, exponential, power, root, sin x and at the same time between inputs - sum, difference, product, quotient

EXTERNAL CONTROL

Lock control keys blocking

Hold display/instrument blocking

Tare tare activation

Resetting MM resetting min/max value

Technical data

PROJECTION

Display: -9999...99999, red or green 14-segment LED, digit height 14 mm
Decimal point: setting - in programming mode
Brightness: setting - in programming mode

INSTRUMENT ACCURACY

TC: 50 ppm/°C
Accuracy: ±0,01 % of range + 1 digit (UQC)
Input frequency: 0,02 Hz...1 MHz
Measuring mode: 2x UP or DW counter, UP or DW counter + frequency, UP/DW counter, UP/DW counter for IRC + frequency, timer/clock/phase
Functions: Data backup, Time backup, Preset
Time base: 0,05...50 s
Calibration constant: 0,00001...999999
Filtration constant: 0/10/20/45/55/.../1000/2000 Hz
PRESET: 0...999999
Pre-division constant: 1/10/60/100/1000/3600
Digital filters: exp./ floating/ arithmetic average, Rounding
Functions: Min/max value, Tare, Mathematic operations
Ext. control: HOLD, LOCK, Tare, Resetting to zero
Data record: measured data record into instrument memory
RTC: 15 ppm/°C, time-date-display value, < 250k data
FAST: display value, < 8k data
Watch-dog: reset after 0,4 s
OM Link: Company communication interface for operation, setting and update of instruments
Calibration: at 25 °C and 40 % r.h.

COMPARATOR

Type: digital, setting in prog. mode, contact switch < 10 ms
Limits: -99999...999999
Hysteresis: 0...999999
Delay: 0...99,9 s
Output: 2x relay Form A (250 VAC/30 VDC, 3 A) and 2x Form C relay (250 VAC/50 VDC, 3 A), 2x/4x open collector, 2x SSR, 2x latching relay

DATA OUTPUT

Protocol: ASCII, MESSBUS, MODBUS - RTU, PROFIBUS
Data format: 8 bit + no parity + 1 stop bit (ASCII)
 7 bit + even parity + 1 stop bit (DIN Messbus)
Rate: 600...230 400 Baud
RS 232: isolated
RS 485: isolated, addressing (max. 31 instruments)

ANALOG OUTPUT

Type: isolated, programmable with resolution of max. 10 000 points, AO corresponds with the displayed data, type and range are selectable in programming mode
Non-linearity: 0,2 % of range
TC: 100 ppm/°C
Rate: response to change of value < 150 ms
Ranges: 0...2/5/10 V, 0...5 mA, 0/4...20 mA (on request ±10V) (comp. < 500 Ω/12 V or < 1 000 Ω/24 V)

EXCITATION

Adjustable: 5...24 VDC/max. 1,2 W

POWER SUPPLY

10...30 V AC/DC, ±10%, 10 VA
 80...250 V AC/DC, ±10%, 10 VA
Power supply is protected by a fuse inside the instrument

MECHANIC PROPERTIES


Material: Noryl GFN2 SE1, incombustible UL 94 V-I
Dimensions: 96 x 48 x 120 mm
Panel cutout: 90,5 x 45 mm

OPERATING CONDITIONS

Connection: connector terminal board, section < 2,5 mm²
Stabilization period: within 15 minutes after switch-on
Working temperature: 0°...60 °C
Storage temperature: -10°...85 °C
Cover: IP65 (front panel only)
El. safety: EN 61010-1, A2
Insulation resistance: for pollution degree II, measuring cat. III. power supply > 670 V (PI), 300 V (DI) input, output, Exc. > 300 V (PI), 250 V (DI)
EMC: EN 61000-3-2+A12; EN 61000-4-2, 3, 4, 5, 8, 11; EN 55022, A1, A2

PI - Primary insulation, DI - Double insulation

Connection

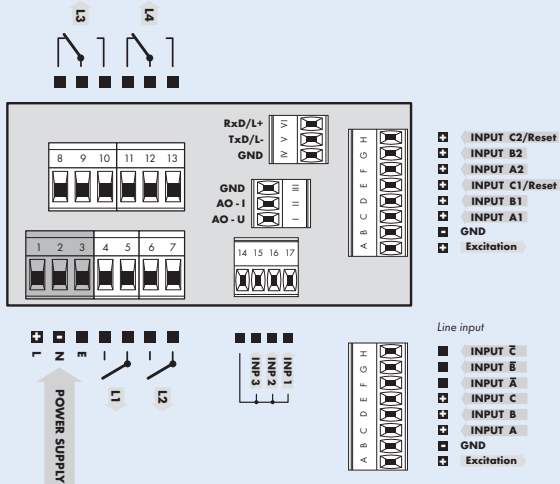

Order code

OM 602UQC*		-							
Power supply	10...30 V AC/DC 80...250 V AC/DC	0 1							
Comparators	2x standard line		A C						
Comparators	no 1x relay (switch-on) 2x relay (switch-on) 3x relay (2x switch-on + 1x switching) 4x relay (2x switch-on + 2x switching) 2x open collector 4x open collector 2x open collector + 2x relay (switching)			0 1 2 3 4 5 6 7 8 9 A B					
Data output	none RS 232 RS 485 MODBUS* PROFIBUS*			0 1 2 3 4					
Analog output	no yes (comp. < 500 Ω/12 V) yes (comp. < 1 000 Ω/24 V)			0 1 2					
Time backup	no yes			0 1					
Excitation	no yes			0 1					
Data record	no RTC FAST				0 1 2				
Display color	red green							1 2	

* Scheduled for sale in 1st Q of 2007