



- MANUAL SWITCH OF MEASURING POINTS 4x 10
- SIZE OF DIN 96 X 48 MM

## OPERATION

Switching of the measuring points is performed by revolving switch on the front panel.


## OMA 10S

The OMA 10S is a manual panel switch of measuring points.

For its parameters, low transitional resistance and high endurance the switch is designed for low-voltage applications (e.g. for sensors Pt 100)

### OMA 10S

MANUAL SWITCH OF MEASURING POINTS

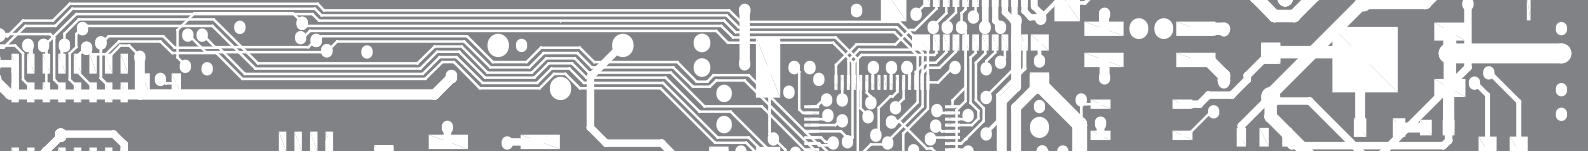

## TECHNICAL DATA

### INPUT

Connection: 4 x 10 positions

- number of positions is adjustable inside the switch [2...10 x 4]

Max. load: 30 VDC/100 mA

Max. current switched: 5 mA

### MECHANIC PROPERTIES

Material: Noryl GFN2 SE1, incombustible UL 94 V-1, black

Dimensions: 96 x 48 x 120 mm

Panel cutout: 90,5 x 45 mm

### OPERATING CONDITIONS

Connection: terminal board, section < 2,5 mm<sup>2</sup>

Working temperature: -20°...60°C

Storage temperature: -20°...85°C


Cover: IP40

Insulation resistance: 50 V

El. safety: EN 61010-1, A2

PI - Primary insulation, DI - Double insulation

## CONNECTION

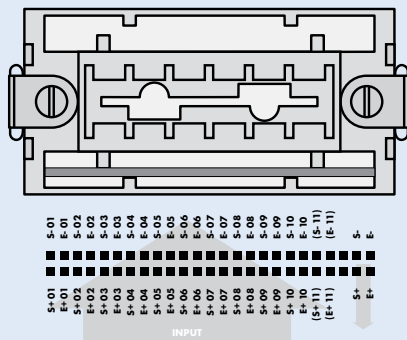

## ORDER CODE

**OMA 10S**