

OMB 412



OMB 412UNI DC VOLTMETER AND AMMETER
PROCESS MONITOR
OHMMETER
THERMOMETER FOR Pt, Cu
THERMOMETER FOR Ni
THERMOMETER
FOR THERMOCOUPLES
DISPLAY UNIT FOR LINEAR
POTENTIOMETERS

OMB 412PWR AC NETWORK ANALYSER
OMB 412UQC UNIVERSAL COUNTER

Description

The OMB 412 model series are panel programmable three-color bar graphs with auxiliary display designed for maximum efficiency and user comfort while maintaining its favourable price. Three versions are available: UNI, PWR and UQC.

The OMB 412UNI is a multifunction instrument with the option of configuration for 8 various input options, easily configurable in the instrument menu.

The instrument is based on an 8-bit microcontroller with a multichannel 24-bit sigma-delta converter, which secures high accuracy, stability and easy operation of the instrument.

Operation

The instrument is set and controlled by five control keys located on the front panel. All programmable settings of the instrument may be performed in three adjusting modes:

Light menu is protected by optional number code and contains solely items necessary for instrument setting

Profi menu is protected by optional number code and contains complete instrument setting

User menu may contain arbitrary items from the programming menu (LIGHT/PROFI), which determine the right (see, change). Access w/o password.

Standard equipment is the OM Link interface, which together with operation program enables modification and filing of all instrument settings as well as perform firmware updates (with OML cable). The program is also designed for visualization and filing of measured values from more instruments .

All settings are stored in the EEPROM memory (they hold even after the instrument is switched off).

Options

Excitation is suitable for feeding of sensors and transmitters. It is isolated, with continuously adjustable value in the range of 5...24 VDC.

Comparators are assigned to monitor one, two, three or four limit values with relay output. The user may select limits regime: LIMIT/DOSING/

- Vertical bargraph 1 x 24 LED with display
- Multifunction device (DC, PM, RTD, T/C, DU)
- Digital filters, Tare, Linearization
- Size of DIN 48 x 96 mm
- Power supply 80...250 V AC/DC

OMLINK

Options

- Excitation • Comparators • Data output • Analog output • Data record
- Power supply: 10...30 V AC/DC

FROM-TO. The limits have adjustable hysteresis within the full range of the display as well as selectable delay of the switch-on in the range of 0...99,9 s. Reaching the preset limits is signalled by LED and simultaneously by the switch-on of the relevant relay.

Data outputs are for their rate and accuracy suitable for transmission of the measured data for further projection or directly into the control systems. We offer an isolated RS232 and RS485 with the ASCII/MESSBUS/MODBUS/PROFIBUS protocol.

Analog outputs will find their place in applications where further evaluating or processing of measured data is required in external devices. We offer universal analog output with the option of selection of the type of output - voltage/current. The value of analog output corresponds with the displayed data and its type and range are selectable in menu.

Measured data record is an internal time control of data collection. It is suitable where it is necessary to register measured values. Two modes may be used. FAST is designed for fast storage (40 records/s) of all measured values up to 8 000 records. Second mode is RTC, where data record is governed by Real Time with data storage in a selected time segment and cycle. Up to 130 000 values may be stored in the instrument memory. Data transmission into PC via serial interface RS232/485 and OM Link.

Standard functions

PROGRAMMABLE PROJECTION

Selection: of input type and measuring range

Measuring range: adjustable as fixed or with automatic change

Measuring modes (PWR): voltage (V_{RMS}), current (A_{RMS}), real power (W), frequency (Hz) and with calculation of Q, S, cos Ψ

Setting: manual, in menu optional projection on the display may be set for both limit values of the input signal

Projection: 24 LED + 6 digit auxiliary display

COMPENSATION

of conduct (RTD, OHM): automatic (3- and 4-wire) or manual in menu (2-wire)

of CJC (T/C): manual or automatic, in menu it is possible to perform selection of the type of thermocouple and compensation of cold junctions, which is adjustable or automatic (temperature at the input brackets)

LINEARIZATION

Linearization (DC, PM, DU): by linear interpolation in 50 points (solely via OM Link)

DIGITAL FILTERS

Filtration constant (UC): transmits input signal up to 10...2 000 Hz

Floating/Exp./Arithmetic average: from 2...30/100/100 measurements

Rounding: setting the projection step for display

MATHEMATIC FUNCTIONS

Min/max. value: registration of min/max. value reached during measurement

Tare: designed to reset display upon non-zero input signal

Peak value: the display shows only max. or min. value

Mat. operations: polynome, 1/x, logarithm, exponential, power, root, sin x and at the same time between inputs - sum, difference, product, quotient

EXTERNAL CONTROL

Lock control keys blocking

Hold display/instrument blocking

Tare tare activation

Resetting MM resetting min/max value

Technical data

PROJECTION

Display: 24 three-color LED with 3-digit aux.display (9.1mm)
Decimal point: setting - in menu
Brightness: setting - in menu

INSTRUMENT ACCURACY

TC: 100 ppm/°C
Accuracy: ±0,1% of range + 1 digit
 ±0,15% of range + 1 digit (RTD, T/C)
 ±0,3% of range + 1 digit (PWR)
The accur. applies for project. 9999 and rate 5 (2,5) meas./s (PWR)
Accuracy of cold junction measurement: ±1 °C
Rate: 1,3...40 meas./s, 0,5...5 meas./s (PWR)
Overload capacity: 10x (t < 30 ms) - not for > 400 V, 5 A; 2x
Measuring modes (PWR): voltage (V_{RMS}), current (A_{RMS}), real power (W), frequency (Hz) and with calculation of Q, S, cos Ψ
Linearization (DC, PM, DU): by linear interpolation in 50 points
Time base (UQC): 0,05...50 s
Calibration constant (UQC): 0,00001...999999
Filtration constant (UQC): 0/10/20/45/55/.../1000/2000 Hz
PRESET (UQC): 0...999999
Digital filters: Exp./Floating/Arithmetic average, Rounding
Functions: Offset, Min/max value, Tare, Peak value, Mat. operat.
Ext. control: HOLD, LOCK, Tare, resetting
Data record: measured data record into instrument memory
RTC - 15 ppm/°C, time-date-display value, < 130k data
FAST - display value, < 8k data
Watch-dog: reset after 1,2 s
OM Link: Company communication interface for operation,

setting and update of instruments

Calibration: at 25 °C and 40 % r.h.

COMPARATOR

Type: digital, setting in prog. mode, contact switch < 10 ms
Limits: -99999...999999
Hysteresis: 0...999999
Delay: 0...99,9 s
Output: 2x relays Form A (250 VAC/30 VDC, 3 A) and 2x Form C relays (250 VAC/50 VDC, 3 A), 2x/4x open collectors, 2x SSR, 2x bistable relays

DATA OUTPUT

Protocol: ASCII, MESSBUS, MODBUS - RTU, PROFIBUS
Data format: 8 bit + no parity + 1 stop bit
 7 bit + even parity + 1 stop bit (Messbus)
Rate: 600...115 200 Baud
 9 600 Baud...12 Mbaud (PROFIBUS)
RS 232: isolated
RS 485: isolated, addressing (max. 31 instruments)

ANALOG OUTPUT

Type: isolated, programmable with resolution of max. 10 000 points, AO corresponds with the displayed data, type and range are selectable in programming mode
Non-linearity: 0,2 % of range
TC: 100 ppm/°C
Rate: response to change of value < 40 ms
Ranges: 0...2/5/10 V, 0...5 mA, 0/4...20 mA (comp. < 500 Ω/12 V or 1 000 Ω/24 V)

EXCITATION

Adjustable: 5...24 VDC/max. 1,2 W

POWER SUPPLY

10...30 V AC/DC, ±10%, max. 13,5 VA
 80...250 V AC/DC, ±10%, max. 13,5 VA
Power supply is protected by a fuse inside the instrument

MECHANICAL PROPERTIES

Material: Noryl GFN2 SE1, incombustible UL 94 V-1
Dimensions: 48 x 96 x 120 mm
Panel cutout: 90,5 x 45 mm

OPERATING CONDITIONS

Connection: connector terminal board, section < 2,5 mm²
Stabilization period: within 15 minutes after switch-on
Working temperature: 0 °...60 °C
Storage temperature: -10 °...85 °C
Cover: IP65 (front panel only)
El. safety: EN 61010-1, A2
Insulation resistance: for pollution degree II, measuring cat. III, power supply > 600 V (PI), 300 V (DI) input, output, Exc. > 300 V (PI), 150 V (DI)
EMC: EN 61000-3-2+A12; EN 61000-4-2, 3, 4, 5, 8, 11; EN 550222, A1, A2
Seismic capacity: IEC 980: 1993, par. 6

PI - Primary insulation, DI - Double insulation

Measuring ranges

OMB 412 is a multifunction instrument available in following types and ranges

type UNI, standard (code „0“)

DC: ±60/±150/±300/±1 200 mV
PM: 0...5 mA/0...20 mA/4...20 mA/±2 V/±5 V/±10 V/±40 V
OHM: 0...100 Ω/0...1 kΩ/0...10 kΩ/0...100 kΩ
RTD: Pt 100/Pt 500/Pt 1 000
Cu: Cu 50/Cu100
Ni: Ni 1 000/Ni 10 000
T/C: J/K/T/E/B/S/R/N/L
DU: Linear potentiometer (min. 500 Ω)

type UNI, option A

DC: ±0,1/±0,25/±0,5/±2/±5 A/±100 V/±25 V/±500 V

type PWR

input U: 0...10 V/0...120 V/0...250 V/0...450 V
input I: 0...60 mV/0...150 mV/0...300 mV/0...1 A/0...2,5 A/0...5 A


type UQC

Measuring mode (UQC): 2x UP or DW counter, UP or DW counter + frequency, UP/DW counter, UP/DW counter for IRC + frequency, timer/clock/phase (0,02...100 kHz/200 kHz for IRC)

Order code specifikkation

	UNI	PWR	PWR	UQC
w/o	0 = Standard			contact, TTL, NPN/PNP
A	±0,1/±0,25/±0,5/±2/±5 A ±100/±250/±500 V			
K			0...60/150/300 mV	
P			0...1/2,5/5 A	
S		0...10/120 V		
U		0...250/450 V		
Z	on request	on request	on request	

Connection

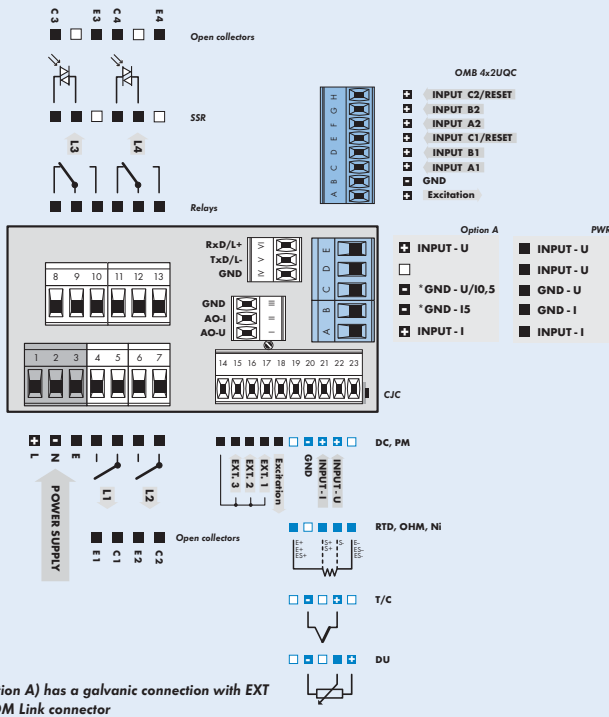

Order code

OMB 412

Type [][][] - [][][][][][][][][]

U	N	I							
P	W	R							
U	Q	C*							

Power supply

10...30 V AC/DC **0**
 80...250 V AC/DC **1**

Option, see table „Measuring ranges“

Comparators

none	0
1x relay (Form A)	1
2x relays (Form A)	2
3x relays (2x Form A + 1x Form C)	3
4x relays (2x Form A + 2x Form C)	4
2x open collector	5
4x open collector	6
2x open collector + 2x relays (Form C)	7
2x relays (Form C)	8
2x SSR	9
2x bistable relays	A
1x relay (Form C)	B

Analog output

no **0**
 yes (compensation < 500 Ω/12 V) **1**
 yes (compensation < 1 000 Ω/24 V) **2**

Data output

none **0**
 RS 232 **1**
 RS 485 **2**
 MODBUS **3**
 PROFIBUS **4**

Excitation

no **0**
 yes **1**

Data record

no **0**
 RTC **1**
 FAST (only for UNI) **2**

Display color

red **1**
 green **2**

*GND (Option A) has a galvanic connection with EXT input and OM Link connector

* Scheduled for distribution 1.Q/2008
 For complete technical parameters of OMB 412UQC see the universal counter OM 602UQC