



OMD 202RS

The OMD 202 model series are large programmable displays for indoor and outdoor use with IP64 protection.

Type OMD 202UQC is a data display from serial lines RS 232/485 with protocol ASCII, MESSBUS, PROFIBUS DP and MODBUS RTU.

The instrument is based on a single-chip microcontroller, which secures accuracy, stability and easy operation of the instrument.

Displays are suitable for projection of measured data in production lines and manufacture with good legibility up to 80 m.



DATA DISPLAY

- 4/6-digit programmable projection
- Input: RS 232/485
- ASCII, MESSBUS, PROFIBUS DP, MODBUS RTU
- Three-color or highly luminous LED
- Digit height 57; 100; 125 mm, IR operation
- Power supply 10...30 V AC/DC; 80...250 V AC/DC
- Option
Excitation • Comparators • Data output • Analog output

OMD 202RS DATA DISPLAY

OPERATION

The instrument is set and controlled by an IR remote control. All programmable settings of the instrument may be performed in three adjusting modes:

LIGHT MENU is protected by optional number code and contains solely items necessary for instrument setting.

PROFI MENU is protected by optional number code and contains complete instrument setting.

USER MENU may contain arbitrary items from the programming menu (LIGHT/PROFI), which determine the right (see, change). Access w/o password.

Standard equipment is the OM Link interface, which together with operation program enables modification and filing of all instrument settings as well as performing firmware updates (with OML cable). The program is also designed for visualization and filing of measured values from more instruments.

All settings are stored in the EEPROM memory (settings hold even after the instrument is switched off).

The measured units can be displayed on the 6-digit display.

OPTION

EXCITATION for feeding sensors and transmitters. It is continuously adjustable in the range of 5 ... 24 VDC.

COMPARATORS are assigned to monitor 1 - 4 limit values with relay output. As a user you can select the mode limit: LIMIT/BATCH/FROM-TO. The limits have adjustable hysteresis within the full range of the display as well as selectable delay of the switch-on in the range of 0...99,9 s. Reaching the preset limits is signalled by LED and simultaneously by the switch-on of the relevant relay.

DATA OUTPUTS are for their rate and accuracy suitable for transmission of the measured data for further projection or directly into the control systems. We offer an isolated RS232 and RS485 with the ASCII/PROFIBUS protocols.

ANALOG OUTPUTS will find their place in applications where further evaluating or processing of measured data is required in external devices. We offer universal analog output with the option of selection of the type of output - voltage/current. The value of analog output corresponds with the displayed data. Its type and range are selectable in menu.

STANDARD FUNCTIONS

PROGRAMMABLE PROJECTION

Input: both RS 232 and RS 485

Protocol: ASCII - Master/Slave/Universal, MESSBUS, PROFIBUS DP, MODBUS RTU

Projection: -999...9999/-99999...999999

MATHEMATIC FUNCTIONS

Linearization: non-linear signals can be linearized by the means of a linearization table (up to 50 points)

Tare: designed to reset display upon non-zero input signal

Min./max. value: registration of min./max. value reached during measurement

Peak value: the display shows only max. or min. value

Mathemat. operations: polynom, 1/x, logarithm, exponential, power, root, sin x

DIGITAL FILTERS

Floating/Exp./Arithm. average: from 2...30/100/100 measurements

Rounding: setting the projection step for display

EXTERNAL CONTROL

Lock: control keys blocking

Hold: display/instrument blocking

Tare: tare activation

Resetting MM: resetting min./max. value

TECHNICAL DATA

INPUT

| | |
|------------------|--|
| Number of inputs | 1 |
| RS Input | fixed - by order RS 232/RS 485 PROFIBUS |
| Protocol | ASCII - data display, controlled from the master system ASCII - Master - the instrument controls data sending from the slave system - „COMM“ can be used to select the received data - the instrument asks with the rate of 10 queries/s ASCII - Slave - Passive bus display where other devices or computers communicate in „MAST.“ mode. If the „COMM“ and the requested data are correctly received, they will be displayed by the instrument ASCII - Universal - in dynamic menu items (Stat, Ad.Un, Sign, Data, Stop, Req.) you can build your own communication protocol format MESSBUS MODBUS RTU PROFIBUS DP |
| Format | 8 bit + no parity + 1 stop bit 7 bit + even parity + 1 stop bit |
| Adresse | 0...31 (ASCII) / 1...247 (Modbus) / 1...127 (Profibus) |
| Rate | 300...230 400 Baud 9 600 Baud...12 Mbaud (PROFIBUS) |

PROJECTION

Display: -999...9999 or -99999...999999
single color - highly luminous individ. LED
three-color - segment LED
Digit number: 4 (100/125 mm) or 6 (57/100/125 mm)
Digit height: 57, 100 or 125 mm
Display color: red or green (highly luminous - 1200 mcd)
red/green/orange
Description: the last two digits for a 6-digit display can be used to describe the measured quantities (menu adjustable)
Decimal point: adjustable - in menu
Brightness: adjustable - in menu

INSTRUMENT ACCURACY

TC: 50 ppm/°C
Linearization: linear interpolation in 50 points (only via OM Link)
Digital filters: Exp./Floating/Arithm. average, Rounding
Functions: Offset, Min/max value, Tare, Peak value, Mat. operations
OM Link: company communication interface for operation, setting and update of instruments
Watch-dog: reset after 400 ms
Calibration: at 25°C and 40 % r.h.

COMPARATOR

Type: digital, menu adjustable, contact switch-on < 30 ms
Hysteresis mode: switching limit, hysteresis band (Lim and $\pm 1/2$ Hys.) and time ($\pm 99,9$ s) determining the switching delay
Mode From-To: switching on and switching off interval
Mode Batch: period, its multiples and time (0...99,9 s), within which the output is active
Output: 1...4x relays Form A (250 VAC/50 VDC, 3 A)

ANALOG OUTPUTS

Type: isolated, programmable with a 16-bit D/A converter, output type and range are optional in the menu

Non-linearity: 0.1% of range

TC: 15 ppm/°C

Rate: response to change of value < 1 ms

Ranges: 0...2/5/10 V, ± 10 V, 0...5 mA, 0/4...20 mA

(comp. < 600 Ω /12 V or 1 000 Ω /24 V)

EXCITATION

Adjustable: 5...24 VDC/max. 1,2 W, separated

POWER SUPPLY

Range: 10...30 V AC/DC, ± 10 %, PF $\geq 0,4$, I_{STP} < 75 A/1 ms, isolated
80...250 V AC/DC, ± 10 %, PF $\geq 0,4$, I_{STP} < 45 A/1 ms, isolated
Consumption: < 22 W/22 VA
Power supply is protected by a fuse inside the instrument.

MECHANIC PROPERTIES

Material: Anodized aluminium, black
Dimensions: see picture

OPERATING CONDITIONS


Connection: connector terminal blocks, section < 1,5/2,5 mm²
Stabilization period: within 5 minutes after switch-on
Working temperature: -20°...60°C
Storage temperature: -20°...85°C
Protection: IP64
Dielectric strength: 4 kVAC per 1 min test between supply and input
4 kVAC per 1 min test between supply and data/analog output
4 kVAC per 1 min test between input and relay output
2,5 kVAC per 1 min test between input and data/analog output
El. safety: EN 61010-1, A2
Insulation resistance: for pollution degree II, measuring cat. III
power supply > 670 V (PI), 300 V (DI)
input, output, PN > 300 V (PI), 150 V (DI)
EMC: EN 61326-1

ACCESSORIES

• holder for wall/ceiling installation

PI - Primary insulation, DI - Double insulation

DIMENSIONS

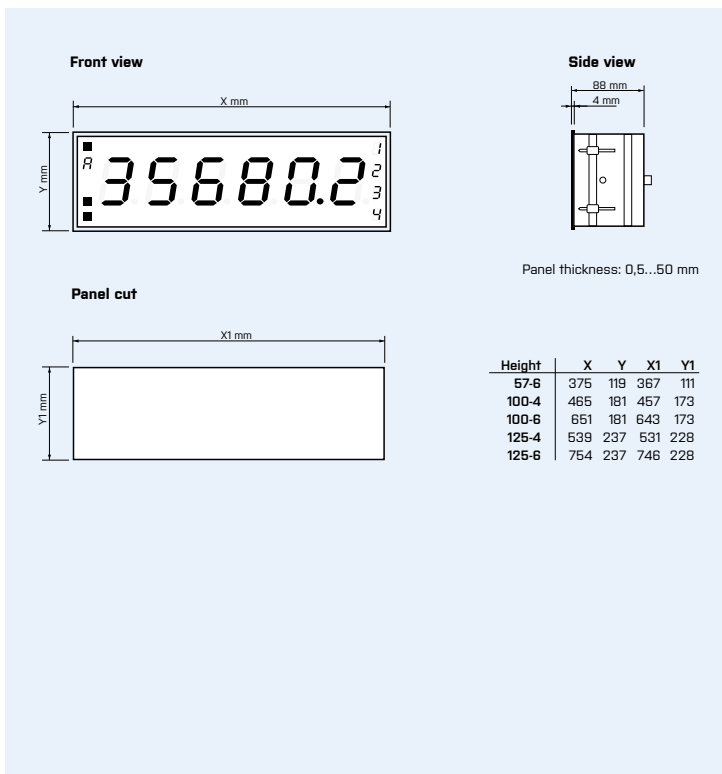

ORDER CODE

| | | | | | | | | | | | |
|--------------------|--|---|---|---|---|---|---|---|---|---|----|
| | | - [] [] [] [] [] [] [] [] [] [] - [] | | | | | | | | | |
| Power supply | 10...30 VDC/24 VAC 80...250 V AC/DC | 0 | 1 | | | | | | | | |
| Data protocol | ASCII Modbus RTU Profibus DP | A | B | C | | | | | | | |
| Comparators | none 1x relay 2x relays 3x relays 4x relays | 0 | 1 | 2 | 3 | 4 | | | | | |
| Analog output | no yes (compensation < 600 Ω /12 V) yes (compensation < 1 000 Ω /24 V) | 0 | 1 | 2 | | | | | | | |
| Excitation | no yes | 0 | 1 | | | | | | | | |
| Digit height | 57 mm 100 mm 125 mm | | | 1 | 2 | 3 | | | | | |
| Number of digits | 4 digits (100/125 mm) 6 digits | | | | | | 1 | 3 | | | |
| Color/Display type | red (highly luminous LED) green (highly luminous LED) red/green/orange (7-segment LED) | | | | | | | | 1 | 2 | 3 |
| Specification | customized version, do not fill in | | | | | | | | | | 00 |

Basic configuration of the instrument is indicated in bold.