



OML 343UNI



Type OML 343UNI is a multifunction instrument with the option of configuration for 8 different input options, easily configurable in the instrument menu. Depth of the instrument box only 30 mm.

The instrument is based on a single-chip microcontroller with an A/D converter, which ensures good accuracy, stability and easy operation of the instrument.

UNIVERSAL INSTRUMENT

- 3,5-DIGIT PROGRAMMABLE PROJECTION
- MULTIFUNCTION INPUT (DC, PM, RTD, T/C, DU)
- DIGITAL FILTERS, LINEARIZATION, TARE
- SIZE OF DIN 96 x 48 MM
- POWER SUPPLY 10...30 VDC/24 VAC

- Option
Comparator

OML 343UNI

- DC VOLTMETER AND AMMETER
- PROCESS MONITOR
- OHMMETER
- THERMOMETER FOR PT/CU/NI/THERMOCOUPLES
- DISPLAY UNIT FOR LINEAR POTENTIOMETERS

OPERATION

The instrument is set and controlled by five buttons accessible from the rear. All programmable settings of the instrument may be performed in three adjusting modes:

LIGHT MENU is protected by optional number code and contains solely items necessary for instrument setting.

PROFI MENU is protected by optional number code and contains complete instrument setting.

USER MENU may contain arbitrary items from the programming menu (LIGHT/PROFI), which determine the right (see, change). Access w/o password.

Standard equipment is the OM Link interface, which together with operation program enables modification and filing of all instrument settings as well as performing firmware updates (with OML cable). The program is also designed for visualization and filing of measured values from more instruments.

All settings are stored in the EEPROM memory (settings hold even after the instrument is switched off).

OPTION

COMPARATOR is assigned to monitor two limit values with relay output. The limits have adjustable hysteresis within the full range of the display as well as selectable delay of the switch-on in the range of 0...99,9 s. Reaching the preset limits is signalled by LED and simultaneously by the switch-on of the relevant relay.

STANDARD FUNCTIONS

PROGRAMMABLE PROJECTION

Selection: of input type and measuring range

Setting: manual, optional projection on the display may be set in menu for both limit values of the input signal, e.g. input 0...10 V > 0...150,0

Projection: ±1999

COMPENSATION

Of conduct (RTD): automatic (3- or 4-wire) or manual in menu (2-wire)

Of conduct in probe (RTD): internal connection (conduct resistance in measuring head)

Of CJC (T/C): manual or automatic, in menu it is possible to perform selection of the type of thermocouple and compensation of cold junctions, which is adjustable or automatic

FUNCTIONS

Linearization: through linear interpolation in 25 points (solely via OM Link)

Tare: designed to reset display upon non-zero input signal

DIGITAL FILTERS

Exponential average: from 2...100 measurements

Rounding: setting the projection step for display

EXTERNAL CONTROL

Hold: display/instrument blocking

Tare: tare activation

TECHNICAL DATA

INPUT					
DC	Range	optional in configuration menu			
		±90 mA < 1 V	Input 5		
	±180 mA < 2 V	Input 5			
	±30 mV > 10 MΩ	Input 3			
	±60 mV > 10 MΩ	Input 3			
	±1 000 mV > 10 MΩ	Input 3			
	±20 V 1 MΩ	Input 1			
	±40 V 1 MΩ	Input 1			
	±80 V 1 MΩ	Input 1			
	PM	Range	optional in configuration menu		
±20 mA < 200 mV			Input 5		
4...20 mA < 200 mV		Input 5			
±2 V 1 MΩ		Input 1			
±5 V 1 MΩ		Input 1			
±10 V 1 MΩ	Input 1				
DHM	Range	optional in configuration menu			
		0...100 Ω			
		0...300 Ω			
		0...15 kΩ			
		0...3 kΩ			
		0...24 kΩ			
Connect.	2, 3 or 4 wire				
	RTD	Type	optional in configuration menu		
EU > 100/500/1 000 Ω, with 3 850 ppm			-50°...450°C		
US > 100 Ω, with 3 920 ppm/°C			-50°...450°C		
RU > 50 Ω with 3 910 ppm/°C			-200°...1 100°C		
RU > 100 Ω with 3 910 ppm/°C			-200°...450°C		
Connect.	2, 3 or 4 wire				
	Ni	Type	optional in configuration menu		
Ni 1 000/10 000 with 5 000 ppm/°C			-50°...250°C		
Ni 1 000/10 000 with 6 180 ppm/°C			-200°...250°C		
-200°...250°C					
Connect.	2, 3 or 4 wire				
	Cu	Type	optional in configuration menu		
Cu 50/100 with 4 260 ppm/°C			-50°...200°C		
Cu 50/100 with 4 280 ppm/°C	-200°...200°C				
Connect.	2, 3 or 4 wire				
	T/C	Type	optional in configuration menu		
J (Fe-CuNi)			Input 3 -200°...900°C		
K (NiCr-Ni)			Input 3 -200°...1 300°C		
T (Cu-CuNi)			Input 4 -200°...400°C		
E (NiCr-CuNi)			Input 3 -200°...690°C		
B (PtRh30-PtRh6)			Input 4 300°...1 820°C		
S (PtRh10-Pt)			Input 4 -50°...1 760°C		
R (PtRh-Pt)			Input 4 -50°...1 740°C		
N (Omega alloy)			Input 3 -200°...1 300°C		
L (Fe-CuNi)			Input 3 -200°...900°C		
DU			Potent. power supply	2,5 VDC/6 mA, Potentiometer resistance > 500 Ω	

External input	
1 input, on contact	
The following functions can be assigned:	
OFF	input off
HLD.	display stop
TAR.	tare activation

PROJECTION

Display: ±1999, single color 7-segment LED
Digit height: 14 mm
Display color: red or green
Decimal point: adjustable - in menu
Brightness: adjustable or automatically controllable

INSTRUMENT ACCURACY

TK: 50 ppm/°C
Accuracy: ±0,15% of range + 1 digit
Accuracy of cold junction measur.: ±1,5°C
Rate: 0,5...20 measur./s
Overload capacity: 2x; 10x (t < 30 ms)
Resolution: 0,1°C (RTD), 1°C (T/C)
Line compensation: max. 30 Ω (RTD)
Cold junction compens.: adjustable -20°...99°C or automatic
Linearization: linear interpol. in 25 points (only via OM Link)
Digital filters: exponential average, rounding
Functions: Tare
OM Link: Company communication interface for operation, setting and update of instruments.
Watch-dog: reset after 500 ms
Calibration: at 25°C and 40 % r.h.

COMPARATOR

Type: digital, menu adjustable, contact switch-on < 50 ms
Hysteresis mode: switching limit, hysteresis band „Lim ±1/2Hys.“ and time [±99,9 s] determining the switching delay
Output: 1x Form A relay (250 VAC/30 VDC, 3 A),
 1x open collector (30 VDC/100 mA)

POWER SUPPLY

Range: 10...30 VDC/24 VAC, ±10 %, PF ≥ 0,4, I_{typ} < 45 A/11 ms, isolated
Consumption: < 1,8 W/1,9 VA

MECHANIC PROPERTIES


Material: Polycarbonate, incombustible UL 94 V-0
Dimensions: 96 x 48 x 30 mm (w x h x d)
Panel cutout: 92 x 44 mm (w x h)

OPERATING CONDITIONS

Connection: connector terminal blocks, section < 1,5 mm²
Stabilization period: within 15 minutes after switch-on
Working temperature: -20°...60°C
Storage temperature: -20°...85°C
Protection: IP65 (front panel only with a gasket)
El. safety: EN 61010-1, A2
Dielectric strength: 2,5 kVAC per 1 min test between supply and input
 4 kVAC per 1 min test between input and relay output
Insulation resistance: for pollution degree II, measuring cat. III
 power supply > 300 V [PI]
 input, output > 300 V [DI]
EMC: EN 61326-1

PI - Primary insulation, DI - Double insulation

CONNECTION

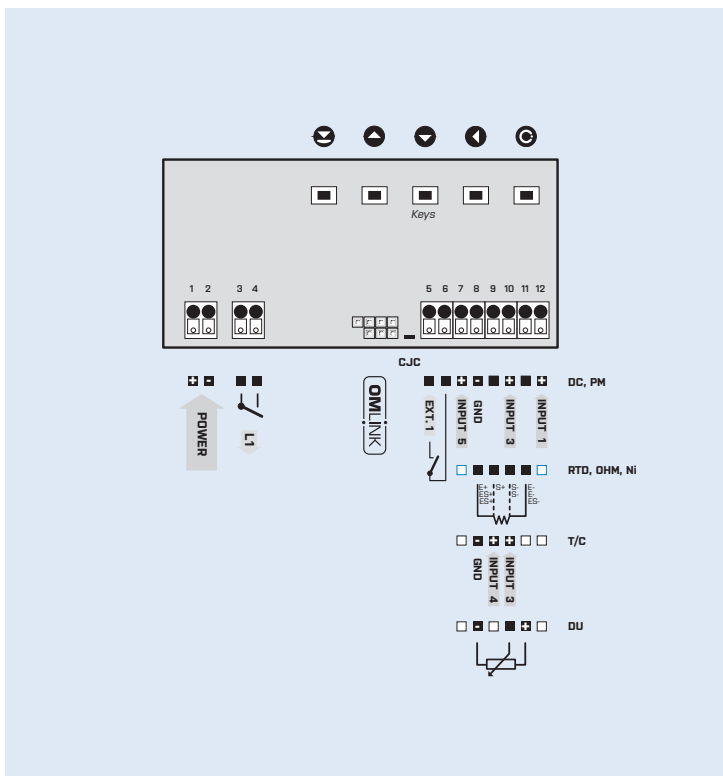

ORDER CODE

OML 343UNI

Comparator	no	0		
	1x relay (Form A)	1		
	1x open collector	2		
Display color	red	1		
	green	2		
Gasket	no		0	
Silicone gasket between instrument and panel	yes		1	
Specification	customized version, do not fill in			00

Basic configuration of the instrument is indicated in bold.