



OML 643UQC

OMLINK

Type OML 643UQC is an inexpensive 6-digit universal panel counter/frequency meter/timer/clock with a box depth of only 30 mm.

The instrument is based on a single-chip microcontroller, which secures good accuracy, stability and easy operation of the instrument.

UNIVERSAL COUNTER

- 6-DIGIT PROGRAMMABLE PROJECTION
- COUNTER/FREQUENCY/CLOCK/TIMER
- 0,1 Hz...50 kHz; UP/DW COUNTER, IRC
- DIGITAL FILTERS, TARE, LINEARIZATION, SUM
- SIZE OF DIN 96 x 48 mm
- POWER SUPPLY 10...30 VDC/24 VAC
- Option
Comparator, Time backup

OML 643UQC
UNIVERSAL COUNTER

OPERATION

The instrument is set and controlled by five buttons accessible from the rear. All programmable settings of the instrument may be performed in three adjusting modes:

LIGHT MENU is protected by optional number code and contains solely items necessary for instrument setting.

PROFI MENU is protected by optional number code and contains complete instrument setting.

USER MENU may contain arbitrary items from the programming menu (LIGHT/PROFI), which determine the right (see, change). Access w/o password.

Standard equipment is the OM Link interface, which together with operation program enables modification and filing of all instrument settings as well as performing firmware updates (with OML cable). The program is also designed for visualization and filing of measured values from more instruments.

All settings are stored in the EEPROM memory (settings hold even after the instrument is switched off).

OPTION

COMPARATOR is assigned to monitor one limit value with relay output. The limits have adjustable hysteresis within the full range of the display as well as selectable delay of the switch-on in the range of 0...99,9 s. Reaching the preset limits is signalled by LED and simultaneously by the switch-on of the relevant relay.

TIME BACKUP is suitable where time needs to be measured even in case of voltage supply outage (upon power supply outage the instrument does not display).

STANDARD FUNCTIONS

PROGRAMMABLE PROJECTION

Selection: measuring mode

Setting: measur. mode counter/frequency/timer/clock with adjustable calibration coefficient, time base and projection

Measur. modes: counter/frequency meter/UP-DW counter/frequency/counter for IRC

Measur. channels: A and B, two independent functions (number/frequency) can be evaluated from one measuring input

Projection: -99999...999999 with stable or floating DT in format 10/24/60

FUNCTIONS

Linearization: through linear interpolation in 25 points (solely via OM Link)

Tare: designed to reset display upon non-zero input signal

Preset: initial nonzero value that is always read after resetting the device

Current value: one-off setting of the initial value

Summation: registration of figures upon shift operation

Time backup: time is running even when the power supply is turned off (the display is off)

DIGITAL FILTERS

Exponential average: from 2...100 measurements

1/Fr.: filter to convert frequency to time

Rounding: setting the projection step for display

Input filter: passes the input signal up to 5...1 000 Hz

EXTERNAL CONTROL

Hold: display/instrument blocking

Lock: control keys blocking

Resetting: counter resetting

Start/Stop: timer/clock control

Magnet: operation of preselected functions

TECHNICAL DATA

INPUT

UQC Input	optional in configuration menu on contact, TTL, NPN/PNP 0...30 V, comparison levels are adjustable in the menu or automatic
Input frequency	0,1 Hz...50 kHz [Mode SINGLE] 0,1 Hz...20 kHz [Mode UP/DW] 0,1 Hz...20 kHz [Mode UP-DW] 0,1 Hz...20 kHz [Mode QUADR. - frequency] 0,1 Hz...10 kHz [Mode QUADR. - counter] (for duty cycle 50 %)
Measur. mode	SINGLE counter/frequency QUADR counter/freq, meter for IRC sensors UP/DW UP/DW counter/freq, meter UP - DW and can display numbers/frequency UP - DW counter/frequency - measures on inputs A (UP), B (DW) and can display numbers/frequency TIME Timer RTC Clock
Time base	0,5/1/5/10 s
Calibr. constant	0,00001...999999
Preset	0...999999
Input filter	0/5/40/100/1000 Hz
Functions	Preset Summation One time setting of the initial value Time backup [Timer/clock]
External input	1 input, on contact The following functions can be assigned: OFF input off LOCKK control keys blocking HOLD display stop TARE fare activation CLEAR display reset SUMA sum showing CLR.ST. counter/timer reset and preset CL.SUM. sum reset COUNT. switching counter/frequency display
Magnet	right bottom corner of the display, in menu you can set the same magnet functions as those for external input

PROJECTION

Display: -99999...999999, single color 7-segment LED
Digit height: 14 mm
Display color: red or green
Decimal point: adjustable - in menu
Brightness: adjustable or automatically controllable

INSTRUMENT ACCURACY

TK: 50 ppm/°C
Accuracy: ±0,02 % of value + 1 digit
±0,02 % of value ±2 ms (timer)
±0,02 % of value ±130 ms (RTC)
Overload capacity: 2x; 10x [t < 30 ms]
Watch-dog: reset after 500 ms
Digital filters: exponential average, rounding, input filter
Functions: data backup, Time backup, Preset, Summation, Tare
Time backup: Lithium cell CR 2032, 3V/220 mAh
OM Link: Company communication interface for operation, setting and update of instruments.
Calibration: at 25°C and 40 % r.h.

COMPARATOR

Type: digital, menu adjustable, contact switch-on < 50 ms
Hysteresis mode: switching limit, hysteresis band „Lim ±1/2 Hys.“ and time [0...99,9 s] determining the switching delay
Mode C-Puls [L1] - automatic counter resetting at the set value
Mode Once [L2] - switching limit, which will switch off only after the counter has been reset
Output: 1x Form A relay (250 VAC/30 VDC, 3 A);
1x open collector (30 VDC/100 mA)

POWER SUPPLY

Range: 10...30 VDC/24 VAC, ±10 %, PF ≥ 0,4, I_{sp} < 45 A/11 ms
10...30 VDC/24 VAC, ±10 %, PF ≥ 0,4, I_{sp} < 45 A/11 ms, isolated
Consumption: < 1,8 W/1,9 VA

MECHANIC PROPERTIES


Material: Polycarbonate, incombustible UL 94 V-0
Dimensions: 96 x 48 x 30 mm (w x h x d)
Panel cutout: 92 x 44 mm (w x h)

OPERATING CONDITIONS

Connection: connector terminal blocks, section < 1,5 mm²
Stabilization period: within 15 minutes after switch-on
Working temperature: -20°...60°C
Storage temperature: -20°...85°C
Protection: IP65 (front panel only with a gasket)
El. safety: EN 61010-1, A2
Dielectric strength: 2,5 kVAC per 1 min test between supply and input
4 kVAC per 1 min test between input and relay output
Insulation resistance: for pollution degree II, measuring cat. III
power supply > 300 V [PI]
input, output > 300 V [DI]
EMC: EN 61326-1

PI - Primary insulation, DI - Double insulation

CONNECTION

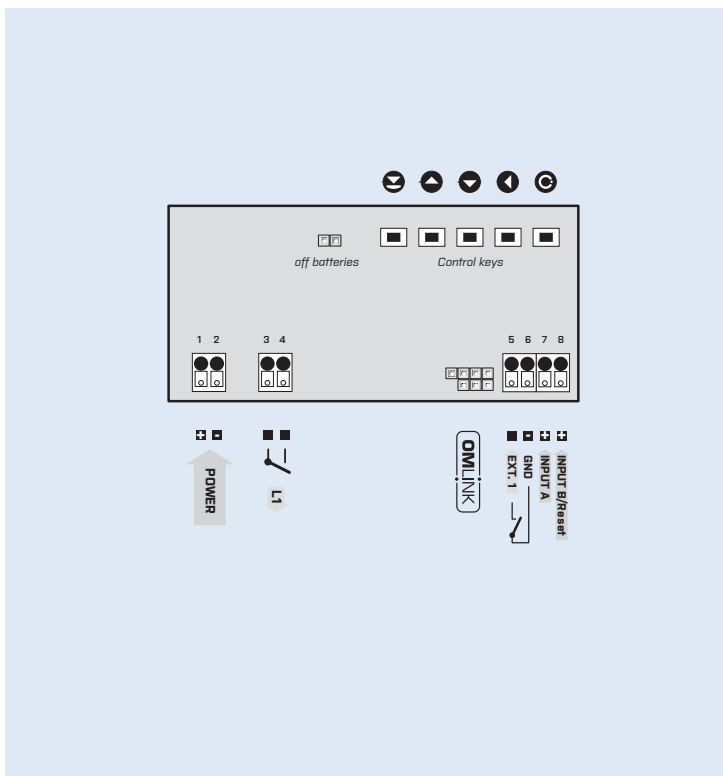

ORDER CODE

OML 643UQC

Power supply	10...30 VDC/24 VAC 10...30 VDC/24 VAC, isolated	0								
Comparator	no 1x relay (Form A) 1x open collector	0 1 2								
Time backup	no Only for measur. mode „Timer/clock“	0 1								
Display color	red green		1 2							
Gasket	no Silicone gasket between instrument and panel			0 1						
Magnet	no For operation of external functions							0 1		
Specification	customized version, do not fill in									00

Basic configuration of the instrument is indicated in bold.