



## OMX 333UQC



The OMX 333 model series are simple DIN rail mountable programmable transmitters.

Type OMX 333UQC is a universal transmitter - counter/frequency meter/timer/clock adjustable in the instrument's menu.

The instrument is based on a single-chip microcontroller, which provides good stability and ease of use.

### PROGRAMMABLE ISOLATED TRANSMITTER

- Counter/Frequency/Clock/Timer
- Digital filters, Tare, Linearization, Sum
- Output: 0/4...20 mA/0...5 mA/0...2/5/10 V/±10 V
- Galvanic separation: 2,5 kVAC
- Power supply 10...30 VDC/24 VAC
- Option  
Comparators - Data output

**OMX 333UQC**  
UNIVERSAL COUNTER

#### OPERATION

Instrument can be controlled by two push buttons and a DIP switch located on the front panel. When frequent changes of settings are needed, we recommend the use of OM Link interface, which in conjunction with free control SW allows for modification and storage of all instrument's settings and also for firmware upload (using OM Ling cable) from a PC.

The above mentioned SW can also be used for visualisation and archiving of measured values from a number of instruments via the RS 485 line.

All settings are stored in the EEPROM memory (they hold even after the instrument is switched off).

#### OPTION

**COMPARATORS** are assigned to monitor two limit values with relay output. The limits have adjustable hysteresis within the full range of the display as well as selectable delay of the switch-on in the range of 0...99,9 s. Reaching the preset limits is signalled by LED and simultaneously by the switch-on of the relevant relay.

**DATA OUTPUTS** are for their rate and accuracy suitable for transmission of the measured data for further projection or directly into the control systems. We offer an isolated RS485 with ASCII protocol.

#### STANDARD FUNCTIONS

##### PROGRAMMABLE INPUT

**Setting:** measuring mode counter/frequency with adjustable calibration coefficient and time base

**Teach-In:** Min and Max values can be assigned to any two values of (unknown) input signal

##### ANALOG OUTPUT

**Type:** isolated, programmable with a resolution of 16 bit, rate < 0,2 ms

**Ranges:** 0...2/5/10 V/±10 V, 0...5 mA/0/4...20 mA (comp. < 600 Ω)

##### FUNCTIONS

**Linearization:** non-linear signals can be linearized by the means of a linearization table (up to 25 points)

**Tare:** designed to reset display upon non-zero input signal

**Preset:** initial nonzero value that is always read after resetting the device

##### DIGITAL FILTERS

**Exponential average:** from 2...100 measurements

**Rounding:** setting the projection step for display

**Input filter:** passes the input signal up to 5...1 000 Hz

##### EXTERNAL CONTROL

**Hold:** display/instrument blocking

**Lock:** control keys blocking

**Tare:** activation and tare resetting

**Resetting:** counter resetting

## TECHNICAL DATA

### INPUT

Number of inputs	1	
UQC Input	optional in configuration menu on contact, TTL, NPN/PNP 0...30/300 V, comparison levels are adjustable in the menu (9.7 / 14.4 / 19.2 / 23.9 / 28.7 / 33.5 / 38.3 V) or automatic	
Input frequency	0.1 Hz...50 kHz (Mode SINGLE) 0.1 Hz...20 kHz (Mode UP/DW) 0.1 Hz...20 kHz (Mode UP-DW) 0.1 Hz...20 kHz (Mode QUADR. - frequency) 0.1 Hz...10 kHz (Mode QUADR. - counter) (for duty cycle 50 %)	
Measuring mode	SINGLE	counter/frequency
	QUADR	counter/frequency for IRC sensors
	UP/DW	UP/DW counter/frequency - measures on inputs A, B (direction) and can display numbers/frequency
	UP - DW	UP - DW counter/frequency - measures on inputs A (UP), B (DW) and can display numbers/frequency
	TIME	Timer
	RTC	Clock
Time base	0.5/1/5/10 s	
Multipl. constant	0,00001...999999	
Dividing constant	0,00001...999999	
Preset	0...999999	
Input filter	0/5/40/100/1000 Hz allows you to set the maximum valid frequency that is being processed	
Functions	Preset Summation Time backup (Timer/clock)	
External input	1 input, on contact  The following functions can be assigned: OFF input off HLD. display stop LOCK control keys blocking TAR. tare activation CLEAR display reset CLR.ST. reset/counter preset/timer CL.SUM. sum reset	

### INSTRUMENT ACCURACY

TC: 50 ppm/°C  
Accuracy: ±0.01% of range  
Rate: 0.5...100 measurement/s  
Overload capacity: 2x; 10x (t < 30 ms)  
Digital filters: exponential average, rounding, 1/frequency, measurement to full speed (division constant)  
Functions: Tare  
Linearization: through linear interpolation in 25 points (only via OM Link)  
OM Link: company communication interface for operation, setting and update of instruments  
Watch-dog: reset after 500 ms  
Calibration: at 25°C and 40 % r.h.

### COMPARATOR

Type: digital, menu adjustable, contact switch-on < 50 ms  
Hysteresis mode: switching limit, hysteresis band (Lim and ±1/2 Hys.) and time (±99,9 s) determining the switching delay  
Mode C-Puls - automatic counter resetting at the set value  
Mode Once - switching limit, which will switch off only after the counter has been reset  
Mode On Run - output is active when the timer is running  
Output: 1...2x Form A relays (250 VAC/30 VDC, 3 A);  
1...2x open collector (30 VDC/100 mA)

### DATA OUTPUTS

Protocol: ASCII  
Data format: 8 bit + no parity + 1 stop bit (ASCII)  
Rate: 600...230 400 Baud  
RS 485: isolated, addressing (max. 31 instruments)

### ANALOG OUTPUTS

Type: isolated, programmable with a 16 bit D/A converter, type and range are selectable in menu  
Non-linearity: 0.1% of range  
TC: 15 ppm/°C  
Rate: response to change of value < 1 ms  
Ranges: 0...2/5/10 V, ±10 V, 0...5 mA, 0/4...20 mA  
(comp. < 600 Ω/12 V)  
Ripple: 5 mV residual ripple at output voltage of 10 V

### POWER SUPPLY

Range: 10...30 VDC/24 VAC, ±10 %, PF ≥ 0.4, I<sub>STP</sub> < 40 A/1 ms  
10...30 VDC/24 VAC, ±10 %, PF ≥ 0.4, I<sub>STP</sub> < 40 A/1 ms, isolated  
Consumption: < 2 W/2 VA

### MECHANIC PROPERTIES

Material: PA 66, incombustible UL 94 V0, blue  
Dimensions: 25 x 79 x 90.5 (w x h x d)  
Installation: on DIN rail, width 35 mm

### OPERATING CONDITIONS

Connection: connector terminal blocks, section < 1.5 mm<sup>2</sup>  
Stabilization period: within 5 minutes after switch-on

Working temperature: -20°...60°C

Storage temperature: -20°...80°C

Protection: IP20

EI. safety: EN 61010-1, A2


Dielectric strength: 2.5kV per 1 min test between power supply, inputs and outputs

Insulation resistance: for pollution degree II, measuring cat. III  
power supply > 550 V (PI), 255 V (DI)

EMC: EN 61326-1

PI - Primary insulation, DI - Double insulation

## CONNECTION

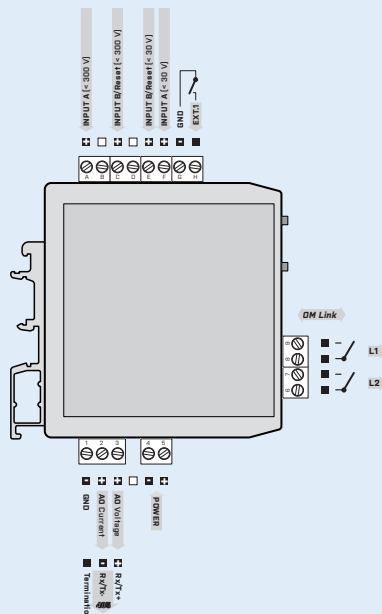

## ORDER CODE

### OMX 333UQC

- [ ] [ ] [ ] - [ ]

Power supply	10...30 VDC/24 VAC	<b>0</b>		
	10...30 VDC/24 VAC, isolated	<b>1</b>		
Comparators	no		<b>0</b>	
	1x relay (Form A)		<b>1</b>	
	2x relay (Form A)		<b>2</b>	
	1x open collector		<b>3</b>	
	2x open collector		<b>4</b>	
Output	none		<b>0</b>	
	analog		<b>1</b>	
	RS 485		<b>2</b>	
Specification	customized version, do not fill in			<b>00</b>

Basic configuration of the instrument is indicated in bold.