



- ISOLATED TRANSMITTERS TO DIN RAIL
- SIZE OF 113 X 98 MM, WIDTH 22 MM
- POWER SUPPLY 80...250 V AC/DC
- Option
Excitation • Power supply 10...30 V AC/DC

OMX 39

The OMX 39 model series are low-price and simple analog transmitters with mounting to 35 mm wide DIN rail.

Transmitters have galvanic separation with isolation voltage of 600 V and thus they are suitable as primary isolation for majority of industrial applications.

OMX 39DC

DC VOLTMETER AND AMMETER

OMX 39AC

AC VOLTMETER AND AMMETER

OMX 39PM

PROCESS MONITOR

OMX 39W

TRANSMITTER FOR WATTMETER

OMX 39OHM

TRANSMITTER FOR OHMMETER

OMX 39RTD

TRANSMITTER FOR THERMOMETER - Pt/Ni

OMX 39DU

TRANSMITTER FOR LINEAR POTENTIOMETERS

OPERATION

The transmitter is designed for simple measurement without further control.

CALIBRATION

By trimmers accessible from the face of the transmitter we may adjust the range of output signal within the range of $\pm 10\%$.

OPTION

EXCITATION is suitable for feeding of sensors and transmitters. It is isolated, with continuously adjustable value in the range of 2...24 VDC.

TECHNICAL DATA

INSTRUMENT ACCURACY

TK: 50 ppm/°C

Accuracy: ±0,1% of range

±0,2% of range

±0,3% of range

±0,5% of range

Rate: continuous measurement

Overload capacity: 2x; 10x (t < 30 ms) - not for > 300 V and 5 A

Calibration: at 25°C and 40 % r.h.

RTD, OHM
AC
W

ANALOG OUTPUT

Type: isolated, fixed setting

TK: 50 ppm/°C

Rate: response to change of value < 1 ms

response to change of value < 1 s (AC, W, RTD, OHM)

Voltage: 0...2 V, 0...5 V, 0...10 V, on request ±10 V (minimum load 1 kΩ)

Current: 0...20 mA, 4...20 mA, on request ±20 mA (comp. < 500 Ω)

EXCITATION

Adjustable: 5...24 VDC/max. 1,2 W

POWER SUPPLY

10...30 V AC/DC, ±10 %, max. 5 VA, PF ≥ 0,4, I_{trip} < 40 A/1 ms

80...250 V AC/DC, ±10 %, max. 5 VA, PF ≥ 0,4, I_{trip} < 40 A/1 ms

Power supply is protected by a fuse inside the instrument

MECHANIC PROPERTIES

Material: PA 66, incombustible UL 94 V-1, blue

Dimensions: 113 x 98 x 22 mm

Installation: to DIN rail 35 mm wide

OPERATING CONDITIONS

Connection: connector terminal board, section < 2,5 mm²

Stabilization period: within 5 minutes after switch-on

Working temperature: -20°...60°C

Storage temperature: -20°...85°C

Cover: IP20

El. safety: EN 61010-1, A2

Dielectric strength: 4 kVAC after 1 min between supply and input

4 kVAC after 1 min between supply and analog output

3,75 kVAC after 1 min between input and analog output

Insulation resistance: for pollution degree II, measuring cat. III.

Power supply > 600 V (ZI), 300 V (DI)

input, output, Exc. > 500 V (ZI), 250 V (DI)


EMC: EN 61326-1

PI - Primary insulation, DI - Double insulation

MEASURING RANGES

	DC	AC	W - U	W - I	PM	OHM	RTD	DU
w/o		40...2 500 Hz				0,1...100 kΩ	-50°...850°C	0,1...100 kΩ
A	60 mV...450 V	60 mV...450 V			0...5 mA		Pt 100	
B	5 mA...5 A	5 mA...5 A			0...20 mA		Pt 500	
C					4...20 mA		Pt 1 000	
D					0...2 V		Ni 1 000	
E					0...5 V			
F					0...10 V			
H				0...60 mV				
J				0...150 mV				
K				0...300 mV				
N				0...1 A				
P				0...5 A				
R			0...120 V					
S			0...150 V					
T			0...250 V					
U			0...450 V					
Z	on request	on request	on request	on request				

CONNECTION

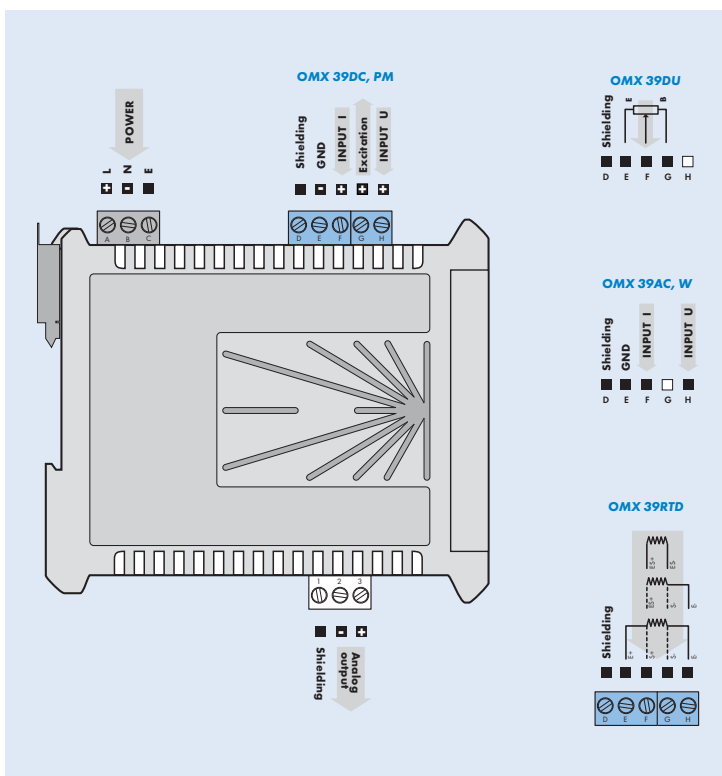

ORDER CODE

OMX 39

Type

□ □ □ - □ □ □ □ □

	D	C				
A	•	•	•	•	•	•
P	•	•	•	•	•	•
W	•	•	•	•	•	•
O	•	•	•	•	•	•
R	•	•	•	•	•	•
T	•	•	•	•	•	•
D	•	•	•	•	•	•

Order code shall not include blank spaces!

Power supply	10...30 V AC/DC	0		
	80...250 V AC/DC	1		
Measuring range, see table „Measuring ranges“		?		
Excitation	no		0	
	yes		1	
Connection	2-wire			1
	3-wire			2
	4-wire			3
Analog output	0...2 V			1
	0...5 V			2
	0...10 V			3
	0...20 mA			4
	4...20 mA			5
	±10 V			6
	±20 mA			7
	0...5 mA			8

Please, state the input range (from the entire range stated) in your order!

Default execution is shown in bold