

## OM 374T/C



2003-3-en

- **3 ¾ digit projection**
- **J/K/T/E/B/S/R/N**
- **Aut. compensation of cold junctions**
- **Quadruple comparator**
- **Size of DIN 96 x 48 mm**
- **Power supply 230 VAC**

### Options

Data output • Universal analog output • Power supply: 24 VAC, 110 VAC, 10...30 VDC

### Description

The OM 374T/C model is a 3 ¾ digit panel thermometer for thermocouples J, K, T, E, B, S, R and N.

The instrument is based on an 8-bit controller with precise A/D converter, that secures high accuracy, stability and easy operation of the instrument.

### Standard functions

#### Programmable input

Type J, K, T, E, B, S, R and N

#### Compensation of cold junctions

Type manual or automatic  
also performed in „CM“ may be the selection of the type of thermocouple and compensation of cold junctions, which is adjustable (0...99 °C) according to temperature in the compensation box or automatic, according to temperature at the input brackets of the instrument

#### Digital filters

Radius of insensitiv. band of suppressed change of measured value

#### External control

Hold display/instrument blocking  
Lock control keys blocking

#### Output

Limits 4 relays with switching contact,  
The limits have both adjustable hysteresis and optional delay of the switch-on. Reaching the limits is signalled by LED and at the same time by the switch-on of the relevant relay.

### Operation

The instrument is set and controlled by five control keys located on the front panel. All programmable settings of the instrument are realised in two adjusting modes.

Configuration menu (hereinafter referred to as CM) is protected by an optional number code and contains complete instrument setting

User menu may contain arbitrary programming settings defined in „CM“ with another selective restriction (see, change)

All programmable parameters are stored in the EEPROM memory (they hold even after the instrument is switched off). The display shows the measured units (°C).

### Options

**Data outputs** are for their rate and accuracy suitable for transmission of the measured data for further projection or directly into the control systems. We offer an isolated RS232 and RS485 with the ASCII protocol.

**Analog outputs** will find their place in applications where further evaluating or processing of measured data is required in external devices. We offer universal analog output with the option of selection of the type of output - voltage/current. The value of analog output corresponds with the displayed data and its type and range are selectable in CM.

## Technical data

### MEASURING RANGE

Type:	J (Fe-CuNi)	0°...900°C
	K (NiCr-Ni)	0°...1 300°C
	T (Cu-CuNi)	0°...400°C
	E (NiCr-CuNi)	0°...690°C
	B (PtRh30-PtRh6)	300°...1 820°C
	S (PtRh10-Pt)	0°...1 760°C
	R (Pt13Rh-Pt)	0°...1 740°C
	N (Omegalloy)	0°... 1300°C

*The instrument measures from the pre-set temperature of cold junction.*

### PROJECTION

Display:	-999...3999, red or green 14-segment LED, digit height 14 mm
Decimal point:	fixed
Brightness:	adjustable - in Configuration/User menu

### INSTRUMENT ACCURACY

Tempco:	60 ppm/°C
Accuracy:	±0,2 % of range + 1 digit
Rate:	1,3 - 2,5 - 5 - 10 - 20 - 40 measurements/s
Comp. of cold junc.:	adjustable 0°...99°C or automatic
Resolution:	1°C
Watch-dog:	reset after 1,2 s
Function:	Hold/Lock (upon contact) Digital filter - adjustable in Configuration menu
Calibration:	at 25°C and 40 % r.h.

### COMPARATOR

Type:	digital, adjustable in programming mode, contact switch-on < 30 ms
Limit 1...4	-999...3999
Hysteresis:	0...999
Delay:	0...99,9 s
Outputs:	4 relays with switching contact (250 VAC/50 VDC, 3 A) upon request SSR (250 VAC, 1 A) or open collector may be fitted

### DATA OUTPUTS

Data format:	rate 600...115 200 Baud 8 bit + no parity + 1 stop bit (ASCII)
RS 232	isolated
RS 485	isolated, addressing (max. 31 instruments)

### ANALOG OUTPUTS

Type:	isolated, programmable with resolution max. 10 000 points, analog output corresponds with the displayed data, output type and range are selectable in CM
Non-linearity:	0,2 % of range
Tempco:	100 ppm/°C
Rate:	response to change of value < 40 ms
Voltage:	0...2 V/5 V/10 V
Current:	0...5 mA/0/4...20 mA (compensation of conduct up to 600 Ohm)

### POWER SUPPLY

24; 110; 230 VAC, 50/60 Hz, ±10 %, 5 VA  
10...30 VDC/max. 300 mA, (24 VDC/150 mA), isolated  
- power supply is protected by a fuse inside the instrument


### MECHANIC PROPERTIES

Material:	Noryl GFN2 SE1, incombustible UL 94 V-1
Dimensions:	96 x 48 x 120 mm
Panel cut:	90,5 x 45 mm


### OPERATING CONDITIONS

Connection:	connector terminal board, conductor section up to 2,5 mm <sup>2</sup>
Stabilization period:	within 15 minutes after switch-on
Working temperature:	0°...60°C
Storage temperature:	-10°...85°C
Covering:	IP65 (front panel only)
Construction:	safety class I
Electrical safety:	EN 61010-1, A2
Overvoltage category:	for pollution degree II III. - instrument power supply, relay outputs (300 V) II. - input, output (300 V)
EMC:	EN 61000-3-2+A12; EN 61000-4-2, 3, 4, 5, 8, 11; EN 55022, A1, A2

## Connection

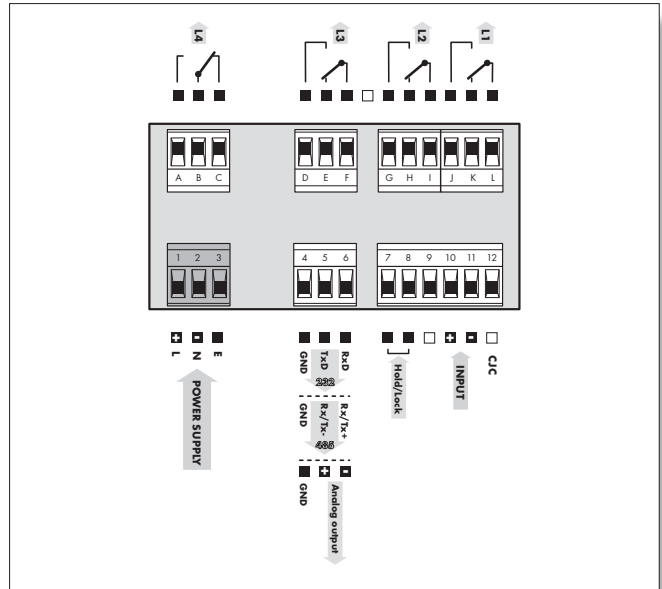

## Dimensions

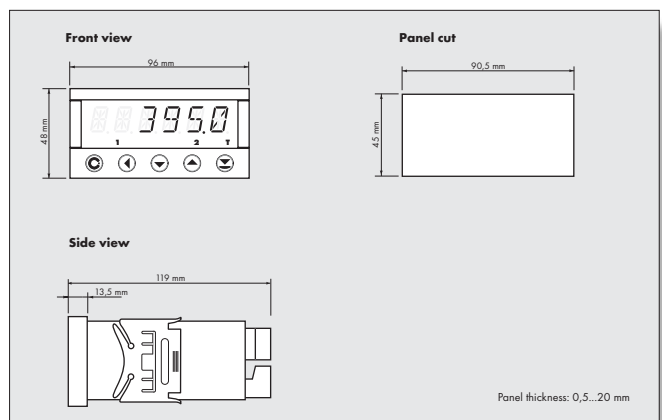

## Order code

