

OM 5011



2003-3-en

- **5 -/6- digit programmable projection**
- **Integrated/momentary value**
- **±2; ±5; ±10 V**
- **0...20 mA; 4...20 mA**
- **Mathematic functions, Digital filters**
- **Size of DIN 96 x 48 mm**
- **Power supply 80...250 V AC/DC**

Options

Comparators • Excitation • Data output • Universal analog output • Real time

Description

The OM 5011 model is a 5 digit panel programmable integrator designed for measurements of voltage or current in dependence on time. Either integrated quantity or momentary value may be projected on the display. The instrument is based on an 8-bit controller with very precise A/D converter, that secures high accuracy, stability and easy operation of the instrument.

Standard functions

Programmable display projection

Setting	manual or automatic, an integration constant may be set in „CM“ by entering a number, that you would receive upon nominal input signal within 1 hour e.g.: 0...20 mA ⇒ at 20 mA/1 hour = 15,38 ±99999/999999 (momentary/integ. value)
Projection	

Digital filters

Floating average	from 2...30 measurements
Exponen. average	from 2...128 measurements
n-th value	from 2...255 measurements
Radius of insensitiv.	band of suppressed change of measured value

Mathematic functions

Min./max. value	registration of min./max. value reached during measurements
Tare	designed to reset display upon non-zero input signal
Top value	the display shows only max. (min.) value for a selected time period
Round up/down	setting the projection step for display
Math. operations	polynome, 1/x, logarithm, exponential, power, root, sin x

External control

Hold	display/instrument blocking
Lock	control keys blocking
Tare	tare activation
Resetting to zero	complete/integrated value or min-max. value

Operation

The instrument is set and controlled by five control keys located on the front panel. All programmable settings of the instrument are realised in two adjusting modes.

Configuration menu	(hereinafter referred to as CM) is protected by an optional number code and contains complete instrument setting
User menu	may contain arbitrary programming settings defined in „CM“ with another selective restriction (see, change)

All programmable parameters are stored in the EEPROM memory (they hold even after the instrument is switched off). The measured units may be projected on the display.

Options

Comparators are assigned to monitor one, two, three or four limit values with relay output. The user may select limits regime: LIMIT/DOSING/FROM-TO. The limits have adjustable hysteresis within the full range of the display as well as selectable delay of the switch-on in the range of 0...99,9 s. Reaching the preset limits is signalled by LED and simultaneously by the switch-on of the relevant relay.

Excitation is suitable for feeding of sensors and transmitters. It is isolated, with continuously adjustable value in the range of 2...24 VDC.

Data outputs are for their rate and accuracy suitable for transmission of the measured data for further projection or directly into the control systems. We offer an isolated RS232 and RS485 with the DIN MessBus/ASCII protocol.

Analog outputs will find their place in applications where further evaluating or processing of measured data is required in external devices. We offer universal analog output with the option of selection of the type of output - voltage/current. The value of analog output corresponds with the displayed data and its type and range are selectable in CM.

Real time is an internal time control of data collection. It is suitable everywhere where it is necessary to register measured data in a given time segment. Up to 65 000 values may be stored in the instrument's memory. Data transmission into PC via serial interface RS232/485.

Technical data

MEASURING RANGE		Impedance/Max. drop	
0...20 mA	< 260 mV		Input I
4...20 mA	< 260 mV		Input I
±2 V	1 MOhm		Input U
±5 V	1 MOhm		Input U
±10 V	1 MOhm		Input U
			upon request

PROJECTION

Display:	±99999 (momentary flow)/999999 (volume flow through), red or green 14-segment LED, digit height 14 mm
Decimal point:	adjustable - in Configuration menu
Brightness:	adjustable - in Configuration/User menu

INSTRUMENT ACCURACY

Tempco:	60 ppm/°C
Accuracy:	±0,05 % of range
Rate:	0,1...8 measurements/s
Time base:	1 s (for integration)
Overload capacity:	10x (t < 30 ms), 2x (long-term)
Watch-dog:	reset after 1,2 s
Input filters:	floating (2-30) and exp. average, radius of insensitiveness, n-th value (2-255)
Function:	offset, min./max. value, tare, top value, Hold, Lock (upon contact)
Real time:	15 ppm/°C
Calibration:	time-date-display value (max. 65000 data) at 25°C and 40 % r.h.

COMPARATOR

Type:	digital, adjustable in programming mode, contact switch-on < 30 ms
Limit 1... 4	±99999/999999 - may be assigned to integrated or momentary value
Hysteresis:	0...9999
Delay:	0...99,9 s
Outputs:	2 relays with switching & 2 relays with switch-on contact (250 VAC/50 VDC, 3 A)

DATA OUTPUTS

Data format:	rate 600...38 400 Baud, 7 bit + even parity + 1 stop bit (DIN MessBus), 8 bit + no parity + 1 stop bit (ASCII)
RS 232	isolated
RS 485	isolated, addressing (up to 31 instruments)

ANALOG OUTPUTS

Type:	isolated, programmable with resolution max. 10 000 points, analog output corresponds with the displayed data, output type and range are selectable in CM
Non-linearity:	0,2 % of range
Tempco:	100 ppm/°C
Rate:	response to change of value < 40 ms
Voltage:	0...2 V/5 V/10 V
Current:	0...5 mA/20 mA/4...20 mA (compensation of conduct up to 600 Ohm)

EXCITATION

Adjustable:	2...24 VDC/50 mA, isolated
-------------	----------------------------

POWER SUPPLY

80 ... 250 V (AC/DC), 13,5 VA
9 ... 50 V (AC/DC), 13,5 VA
- power supply is protected by a fuse inside the instrument


MECHANIC PROPERTIES

Material:	Noryl GFN2 SE1, incombustible UL 94 V-I
Dimensions:	96 x 48 x 154 mm
Panel cut:	90,5 x 45 mm


OPERATING CONDITIONS

Connection:	connector terminal board, conductor section up to 1,5/2,5 mm ²
Stabilization period:	within 15 minutes after switch-on
Working temperature:	0°...60°C
Storage temperature:	-10°...85°C
Covering:	IP65 (front panel only)
Construction:	safety class II
Electrical safety:	EN 61010-1, A2
Overvoltage category:	for pollution degree II
	III. - instrument power supply, relay outputs (300 V)
	II. - input, output, excitation (300 V)
EMC:	EN 61000-3-2+A12; EN 61000-4-2, 3, 4, 5, 8, 11; EN 55022, A1, A2

Connection

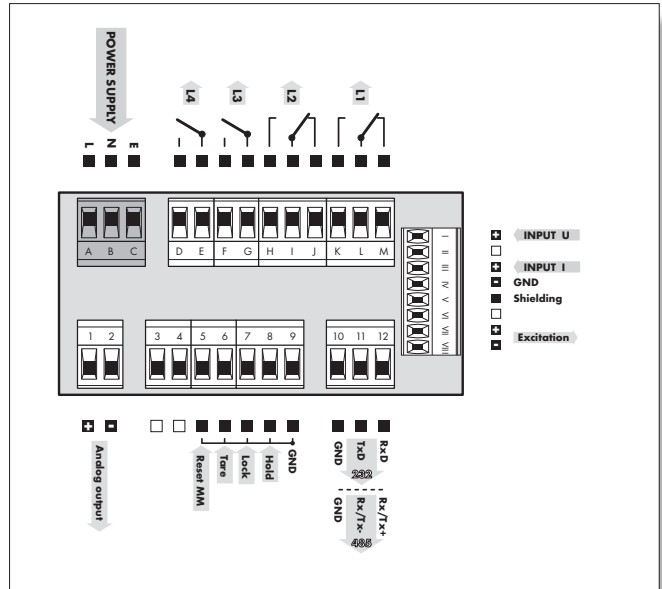

Dimensions

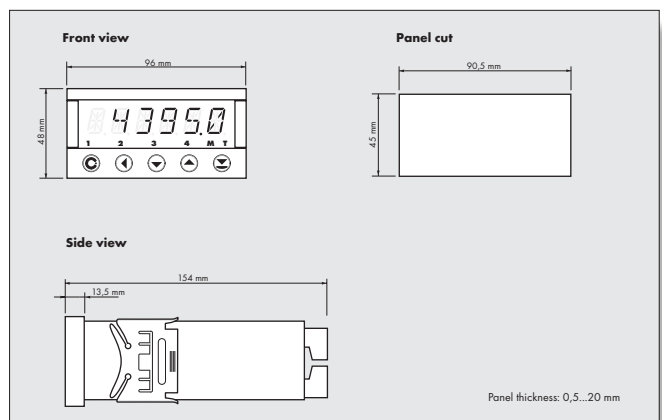

Order code

