

OM 601RS



- **6 digit projection**
- **RS 232 / RS 485**
- **Size of DIN 96 x 48 mm**
- **Power supply 230 VAC**

Extension

Comparators • Excitation • Analogue output • Power supply: 24 VAC, 110 VAC, 8...32 VDC

Description

The OM 601RS model is a 6 digit panel display device for projection of data from serial lines RS 232 and RS 485. Communication is performed with protocol of the ASCII 4000 or DIN Messbus standard.

The instrument is based on an 8-bit μ -processor that secures high accuracy, stability and easy operation of the instrument.

The display may show all ASCII characters applicable for a 14-segment display.

Operation

The instrument is set and controlled by five control keys located on the front panel. All programmable settings of the instrument are realised in two adjusting modes.

Configuration menu (hereinafter referred to as CM) is protected by an optional number code and contains complete instrument setting

User menu may contain arbitrary programming settings defined in „CM“ with another selective restriction (see, change)

All programmable parameters are stored in the EEPROM memory (they hold even after the instrument is switched off).

Options

Excitation is suitable for feeding of sensors and transmitters. It has a galvanic isolation with continuously adjustable value in the range of 2...24 VDC.

Comparators are assigned to monitor one or two limit values with relay output. Limits have adjustable hysteresis and delay. Reaching the set limits is signalled by LED and at the same time by the switch-on of the relevant relay.

Analogue outputs will find their place in applications where further evaluating or processing of measured data is required in external devices. We offer several types of current and voltage isolated outputs, selectable by a shorting link. The analogue output value corresponds with the displayed data and its range is selectable in programming mode.

Technical data

INPUT

Protocols: RS 232/485
ASCII
DIN Messbus

Data format: rate 150...115 200 Baud
7 bit + even parity + 1 stop bit (DIN Messbus)
8 bit + no parity + 1 stop bit (ASCII)

PROJECTION

Display: 999999, red or green 14-segment LED, digit height 14 mm
Decimal point: according to input data
Brightness: adjustable - in Configuration/User menu
Watch-dog: reset after 1,2 s
Calibration: at 25°C and 40 % r.h.

COMPARATOR

Type: digital, adjustable in programming mode, contact switch-on < 10 ms
Limit 1 and 2: 0...999999
Hysteresis: 0...99999
Delay: 0...99,9 s
Outputs: 2 relays with switch-on (switch-off) contact (250 VAC/30 VDC, 3 A)
- the relay function is adjustable in Configuration menu

ANALOGUE OUTPUTS

Type: isolated, programmable with resolution max. 14 bit, analogue corresponds with displayed data, output range is selectable in Configuration menu
Non-linearity: 0,2 % of range
Tempco: 100 ppm/°C
Rate: response to change of value < 100 ms
Voltage: 0...2 V/5 V/10 V
Current: 0...5 mA/0/4...20 mA (compensation of conduct up to 600 Ohm)

POWER SUPPLY

24/110/230 VAC/50 Hz
8...32 VDC/max. 500 mA, (24 VDC/max. 150 mA), isolated


MECHANIC PROPERTIES

Material: Noryl GFN2 SE1, incombustible UL 94 V-I
Dimensions: 96 x 48 x 120 mm
Panel cut-out: 90,5 x 45 mm


OPERATING CONDITIONS

Connection: connector terminal board, conductor section up to 2,5 mm²
Stabilization period: within 15 minutes after switch-on
Working temperature: 0°...60°C
Storage temperature: -10°...85°C
Covering: IP65 (front panel only)
Overvoltage category: EN 61010-1, A2, for pollution degree II
III. - instrument power supply, relay outputs (300 V)
II. - input, output, excitation (300 V)
EMC: EN 61000-3-2+A12; EN 61000-4-2, 3, 4, 5, 8, 11; EN 550222, A1, A2

Connection

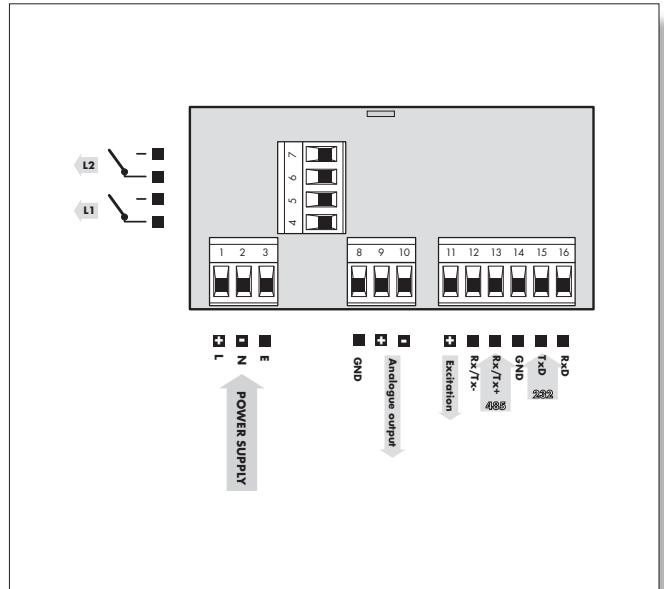

Dimensions

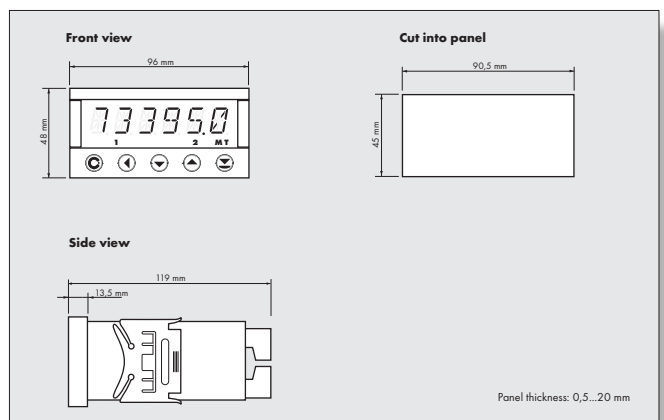

Order code

