

## OM 601UQC



- **6 digit programmable projection**
- **2x counter - UP/DOWN - IRC - frequency - phase - repeat - stopwatch**
- **Measuring range < 100 kHz**
- **Calibration and filtration constant, Preset**
- **Dual comparator, Data backup**
- **Size of DIN 96 x 48 mm**
- **Power supply 230 VAC**

### Options

Excitation • Time backup • Data output • Universal analogue output  
 Power supply: 24 VAC, 110 VAC, 10...30 VDC

### Description

The OM 601UQC model is a universal 6 digit panel programmable impulse counter/frequency meter/repeat/phase evaluation of signal from IRC sensors and stopwatch.

The instrument is based on an 8-bit processor that secures high accuracy, stability and easy operation of the instrument.

### Standard functions

#### Programmable display projection

|                    |   |
|--------------------|---|
| Measuring modes    | counter/frequency meter/dual counter/UP-DW counter/counter for IRC sensors/repeat measurement/stopwatch |
| Calibration        | calibration coefficient may be set in „CM“ for every channel individually                               |
| Projection         | .99999...999999 with fixed or floating DP in adjustable format 10/24/60                                 |
| Measuring channels | A and B, two independent functions may be evaluated from one or more measuring inputs                   |
| Time base          | 0,05/0,5/1/2/5/10/20/50 s   |

#### Digital filters

|                       |   |
|-----------------------|---|
| Filtration constant   | limiting the maximum input frequency, suppressing interfering impulses, 10 Hz...2 kHz |
| Floating average      | from 2...54 measurements  |
| Exponen. average      | from 2...100 measurements   |
| n-th value            | from 2...100 measurements   |
| Radius of insensitiv. | band of suppressed change of measured value   |

#### Function

|                   |   |
|-------------------|---|
| Preset            | initial non-zero value, which is always read after instrument resetting                                 |
| Summation         | registration of the number upon shift operation   |
| Division constant | increas. cal. constant 1/10/60/100/1000/3600  |
| Min./max. value   | registration of min./max. value reached during measurements   |
| Tare              | designed to reset display upon non-zero inp. signal   |
| Top value         | the display shows only max. (min.) value for a selected time period                                     |
| Round up/down     | setting the projection step for display   |
| Mathem. operation | between inputs - A+B, A-B, A*B, A/B, (A-B)/B; polynome, 1/x, logarithm, exponential, power, root, sin x |

#### External control

|      |                             |
|------|-----------------------------|
| Hold | display/instrument blocking |
| Lock | control keys blocking       |

#### Output

|        |  |
|--------|--|
| Limits | 2 relays with switch-on contact, type LIMIT/FROM-TO/DOSING<br>Limits have both adjustable hysteresis and optional delay of the switch-on. Reaching the limits is signalled by LED and at the same time by the switch-on of the relevant relay. |
|--------|--|

### Operation

The instrument is set and controlled by five control keys located on the front panel. All programmable settings of the instrument are realised in two adjusting modes.

|                    |  |
|--------------------|--|
| Configuration menu | (hereinafter referred to as CM) is protected by an optional number code and contains complete instrument setting |
| User menu          | may contain arbitrary programming settings defined in „CM“ with another selective restriction (see, change)      |

All programmable parameters are stored in the EEPROM memory (they hold even after the instrument is switched off). The measured units may be projected on the display.

### Options

**Excitation** is suitable for feeding of sensors and transmitters. It has galvanic isolation, with continuously adjustable value in range of 2...24 VDC.

**Data outputs** are for their rate and accuracy suitable for transmission of the measured data for further projection or directly into the control systems. We offer an isolated RS232 and RS485.

**Analogue outputs** will find their place in applications where further evaluating or processing of measured data is required in external devices. We offer universal analogue output with the option of selection of the type of output - voltage/current. The value of analogue output corresponds with the displayed data and its type and range are selectable in CM.

**Time backup** is suitable where time needs to be measured even in case of power supply dropout (upon power supply dropout the instrument does not display)

## Technical data

### INPUT

|                  |  |
|------------------|--|
| Type:            | upon contact, TTL, NPN/PNP   |
| Measurement:     | 1x UP/DOWN counter + 1x frequency<br>2x counter UP or DOWN + 2x frequency<br>1x counter UP or DOWN + 1x frequency (period) measurement<br>1x UP/DOWN for IRC counter + frequency (evaluates both edges of signals A & B)<br>1x phase/repeat measurement<br>1x stopwatch/watch, measuring range is adjustable |
| Input frequency: | 0,02...100 kHz (250 kHz - for IRC input)   |

### PROJECTION

|                |  |
|----------------|--|
| Display:       | -99999...999999, red or green 14-segment LED, digit height 14 mm |
| Decimal point: | adjustable - in Configuration menu                               |
| Brightness:    | adjustable - in Configuration/User menu                          |

### INSTRUMENT ACCURACY

|                          |   |
|--------------------------|---|
| Tempco:                  | 60 ppm/°C   |
| Accuracy:                | ±0,01 % of range (frequency)  |
| Time base:               | 0,05/0,5/1/2/5/10/20/50 s   |
| Calibration coefficient: | 0,00001...99999   |
| Filtration constant:     | 0/0,01/0,02/0,045/0,055/0,065/0,1/0,2/0,5/1/2 kHz   |
| Division constant:       | 1/10/60/100/1000/3600   |
| Presetting:              | 0...999999  |
| Watch-dog:               | reset after 2,25 s  |
| Function:                | data backup, mathematic operations between inputs, summation - registration of shift operation<br>time backup - RTC keeps running even in case of power supply dropout<br>Hold, Lock (upon contact) |
| Calibration:             | at 25°C and 40 % r.h.   |

### COMPARATOR

|                |  |
|----------------|--|
| Type:          | digital, adjustable in programming mode, contact switch-on < 30 ms   |
| Limit 1 and 2: | -99999...99999   |
| Hysteresis:    | 0...99999  |
| Delay:         | 0...99,9 s   |
| Outputs:       | 2 relays with switch-on (switch-off) contact (250 VAC/30 VDC, 3 A) - the relay function is adjustable in Configuration menu<br>upon request SSR (250 VAC, 1 A) or open collector may be fitted |

### DATA OUTPUTS

|              |   |
|--------------|---|
| Data format: | rate 600...115 200 Baud<br>7 bit + even parity + 1 stop bit (DIN MessBus)<br>8 bit + no parity + 1 stop bit (ASCII) |
| RS 232       | isolated, two-way communication   |
| RS 485       | isolated, addressing (max. 31 instruments)  |

### ANALOGUE OUTPUTS

|                |  |
|----------------|--|
| Type:          | isolated, programmable with resolution max. 10 000 points, analogue output corresponds with the displayed data, output type and range are selectable in CM |
| Non-linearity: | 0,2 % of range   |
| Tempco:        | 100 ppm/°C   |
| Rate:          | response to change of value < 40 ms  |
| Voltage:       | 0...2 V/5 V/10 V   |
| Current:       | 0...5 mA/0/4...20 mA (compensation of conduct up to 600 Ohm)   |

### EXCITATION

|             |   |
|-------------|---|
| Adjustable: | 2...9 VDC/100 mA - 9...12 VDC/65 mA - 15...24 VDC/50 mA |
|-------------|---|

### POWER SUPPLY

|  |
|--|
| 24/110/230 VAC, 50/60 Hz, ±10 %, 5 VA                        |
| 10...30 VDC/max. 500 mA, (24 VDC/max. 150 mA), isolated      |
| - power supply is protected by a fuse inside the instruments |


### MECHANIC PROPERTIES

|             |   |
|-------------|---|
| Material:   | Noryl GFN2 SE1, incombustible UL 94 V-I |
| Dimensions: | 96 x 48 x 120 mm                        |
| Panel cut:  | 90,5 x 45 mm                            |


### OPERATING CONDITIONS

|                       |   |
|-----------------------|---|
| Connection:           | connector terminal board, conductor section up to 2,5 mm <sup>2</sup>   |
| Stabilization period: | within 15 minutes after switch-on   |
| Working temperature:  | 0°...60°C, (storage temperature: -10°...85°C)   |
| Covering:             | IP65 (front panel only)   |
| Overvoltage category: | EN 61010-1, A2, for pollution degree II<br>III. - instrument power supply, relay outputs (300 V)<br>II. - input, output, excitation (300 V) |
| EMC:                  | EN 61000-3-2+A12; EN 61000-4-2, 3, 4, 5, 8, 11; EN 550222, A1, A2   |

## Connection

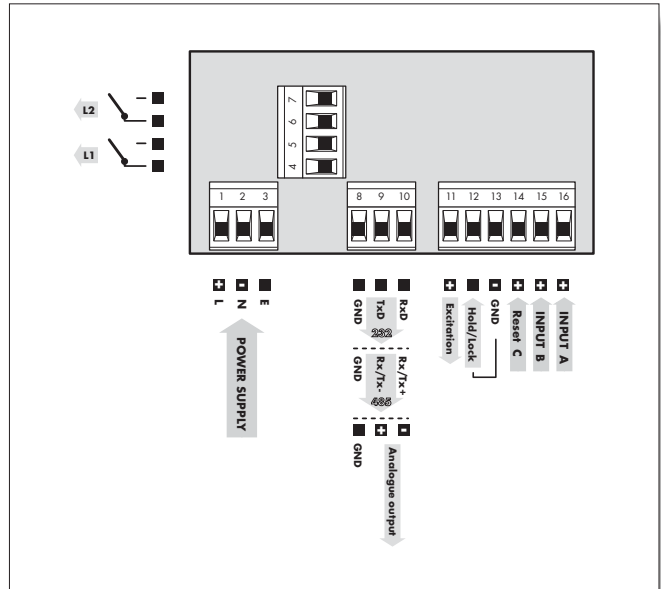

## Dimensions

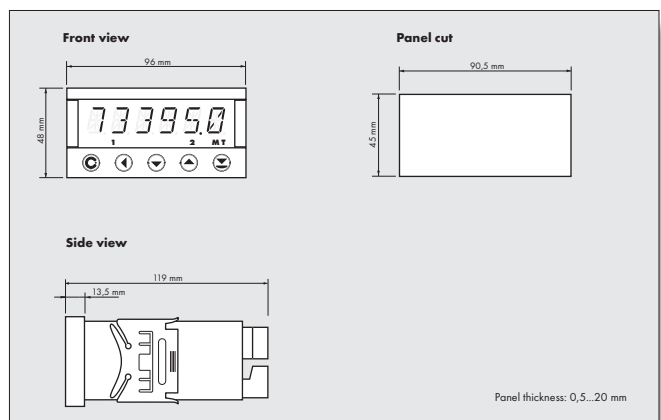

## Order code

