

OMM 601UC



- **6 digit programmable projection**
- **Counter/frequency meter/stopwatch**
- **Measuring range < 50 kHz**
- **Calibration and filtration constant, Preset**
- **Comparator, Data backup**
- **Size of DIN 72 x 24 mm**
- **Power supply 8...32 V AC/DC**

Description

The OMM 601UC model is a small universal 6 digit panel programmable impulse counter/frequency meter/repeat/phase/stopwatch. The instrument is based on an 8-bit μ -processor that secures high accuracy, stability and easy operation of the instrument.

Standard functions

Programmable display projection

Measuring modes	counter/frequency meter/stopwatch
Calibration	calibration coefficient may be set in „CM” for every channel
Projection	·99999...999999 with fixed or floating DT in adjustable format 10/24/60
Measuring channels	A and B, it is possible to evaluate the counter as well as the signal frequency status from one measuring input
Time base	0,05/0,5/1/2/5/10/20/50 s

Digital filters

Filtration constant	limiting the maximum input frequency, suppressing interfering impulses, 10 Hz...2 kHz
Exponen. average n-th value	from 2...100 measurements
Radius of insensitiv.	band of suppressed change of measured value

Function

Preset	initial non-zero value, which is always read after instrument resetting
Summation	registration of the number upon shift operation
Division constant	increas. calib.constant 1/10/60/100/1000/3600
Min./max. value	registration of min./max. value reached during measurements
Top value	the display shows only max. (min.) value for a selected time period

External control

Hold	display/instrument blocking
Lock	control keys blocking

Output Limit

relay with switching contact, type LIMIT/FROM-TO/DOSING
The limit has both adjustable hysteresis and optional delay of the switch-on. Reaching the limit is signalled by LED and at the same time by the switch-on of the relevant relay.

Operation

The instrument is set and controlled by four control keys. All programmable settings of the instrument are realised in two adjusting regimes.

Configuration menu (hereinafter referred to as CM) is protected by an optional number code and contains complete instrument setting

User menu may contain arbitrary programming settings defined in „CM” with another selective restriction (see, change)

All programmable parameters are stored in the EEPROM memory (they hold even after the instrument is switched off). The measured units may be projected on the display.

Technical data

INPUT

Type: upon contact, TTL, NPN/PNP
 Measurement: 1x counter UP or DOWN
 1x measurement of frequency/repeat/phase
 1x stopwatch/watch, measuring range is adjustable
 Input frequency: 0,02...50 kHz

PROJECTION

Display: 999999, red or green 7-segment LED, digit height 9,1 mm
 Decimal point: adjustable - in Configuration menu
 Brightness: adjustable - in Configuration/User menu

INSTRUMENT ACCURACY

Tempco: 25 ppm/°C
 Accuracy: $\pm 0,01$ % of range (frequency)
 Time base: 0,05/0,5/1/2/5/10/20/50 s
 Calibration coefficient: 0,00001...999999
 Filtration constant: 0/0,01/0,02/0,045/0,055/0,065/0,1/0,2/0,5/1/2 kHz
 Division constant: 1/10/60/100/1000/3600
 Presetting: 0...999999
 Function: data backup, summation - registration of shift operation
 Hold, Lock (upon contact)
 Watch-dog: reset after 2,25 s
 Calibration: at 25°C and 40 % r.h.

COMPARATOR

Type: digital, adjustable in programming mode, contact switch-on < 10 ms
 Limit 1: 999999
 Hysteresis: 0...99999
 Delay: 0...99,9 s
 Output: 1 relay with switching contact (48 VAC/50 VDC, 3 A)

POWER SUPPLY

8...32 V AC/DC, max. 80 mA, with galvanic separation


MECHANIC PROPERTIES

Material: Noryl GFN2 SE1, incombustible UL 94 V-I
 Dimensions: 72 x 24 x 106 mm
 Panel cut-out: 68 x 22,5 mm


OPERATING CONDITIONS

Connection: connector terminal board, conductor section up to 2,5 mm²
 Stabilization period: within 15 minutes after switch-on
 Working temperature: 0°...60°C
 Storage temperature: -10°...85°C
 Covering: IP42 (front panel only)
 Overvoltage category: EN 61010-1, A2, for pollution degree II
 III. - instrument power supply, relay outputs (300 V)
 II. - input, output, excitation (300 V)
 EMC: EN 61000-3-2+A12; EN 61000-4-2, 3, 4, 5, 8, 11; EN 550222, A1, A2

Connection

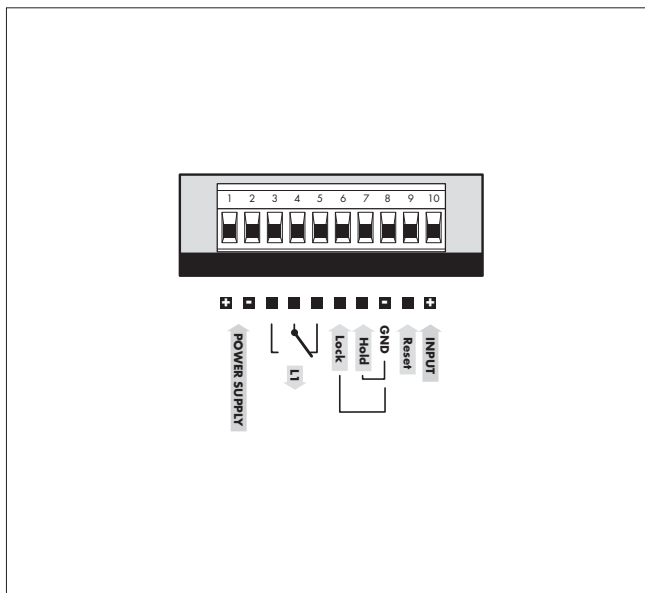

Dimensions

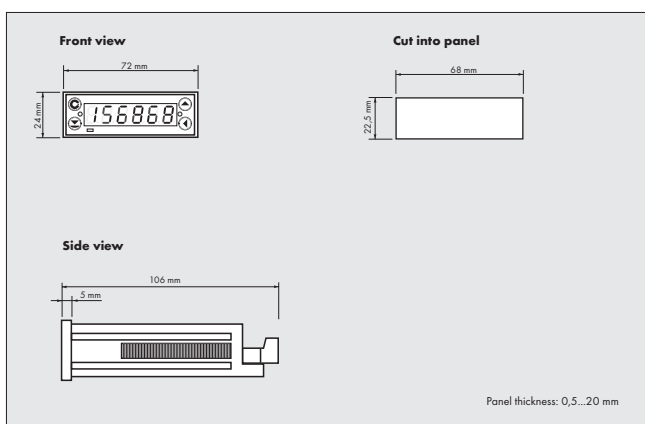

Order code

