

EXC.01

4x EXCITATION



MULTIFUNCTION INPUT


4x 5/10/12/24 V
Overcurrent and thermal protection

Accuracy
±2% + ±0,2 V

Galvanic separation
2,5 kVAC



CARD SETTINGS



The following parameters are edited in the setting


Select the **Position of the card** to be set. Use buttons ◀ ▶ to scroll among the fitted cards.

Type of the card fitted in the specified position.

Data transfer **priority** of the selected card. Bigger number of plugged-in cards slows down data flow on the bus. It can be optimized by setting priorities. The real value of the data flow can be then controlled in diagnostics. The maximum achievable data flow in slots A is 1100 frames/s, in slots B 550 frames /s.

Channel to be set. Use buttons ◀ ◀▶ ▶▶ ▶ to scroll among the channels. Number of possible selectable channels is determined by the card, which is being set

Type	isolated
Range	4x 5...24 VDC/ 3W



Button ⚙️ is used to navigate to the settings of the selected channel.

INSTALLATION OF A NEW CARD

When installing a new card, always make sure the recorder is disconnected from the power supply!

1. Remove the back cover and break off the blinder of a vacant card position. It is recommended to place analogue cards into faster slots in column „A“ (Speed of the bus: Slot „A“ 1 ms, Slot „B“ 2 ms).
2. Remove the card from the shipping container and from the ESD packaging and insert it carefully into the selected slot until you feel a gentle snap
3. Replace the back cover and turn the device on
4. Setting of the card is described in the preceding paragraph

EXC.01

TECHNICAL DATA

OUTPUT

Number	4
Range	5 VDC/1,5 W, 10/12/24 VDC/3 W
Tolerance	±2% + ±0,2 V
Regulation	±0,1 V
Ripple	< 50 mVpp
Outage span	< 200 ms
Efficiency	< 82 %
Functions	active current restriction,

TECHNICAL SPECIFICATION

Watch-dog	reset after 500 ms
Calibration	at 25°C and 40 % r.h.

POWER SUPPLY

Power supply	5 VDC
Consumption	max. 150 mA

MECHANIC PROPERTIES

Dimensions	65 x 98 mm
Installation	to OMR 700

OPERATING CONDITIONS

Connection	connector terminal board, cross section < 1,5 mm ²
Working temperature	-20°...60°C
Storage temperature	-20°...85°C
IP rating	IP00
Construction	safety class I
El. safety	EN 61010-1, A2
Dielectric strength	2,5 kVAC over 1 min between output
Insulation resistance*	for pollution degree II, measuring cat. III. 300 V (PI), 150 (DI)
EMC	EN 61326-1 (Industrial use)
Seismic resistance	IEC 980: 1993, par.6

* PI - Primary insulation, DI - Double insulation

EXC.01

CONNECTION

EXC.01

ORDER CODE

EXC.01



Specifications

Used only for customised versions



00

EXC.1

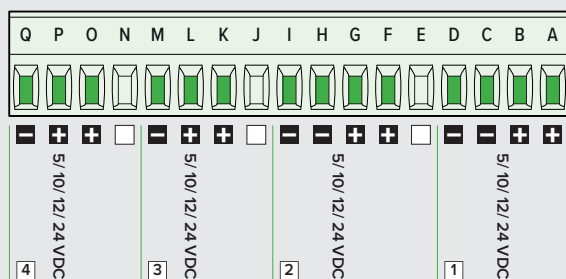

ORBIT MERRET, spol. s r. o.
Vodňanská 675/30
198 00 Praha 9
Czech republic

tel.: +420 281 040 200
fax.: +420 281 040 299
orbit@merret.eu
www.orbit.merret.eu

